



DS-2CD8264FWD-EI(S) 1.3 MP Network Bullet Camera

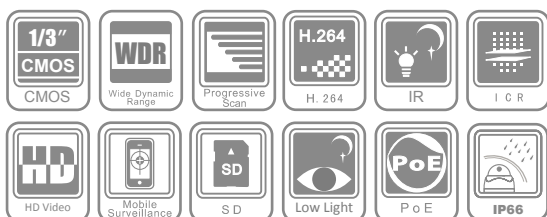

Key Features

- 1.3 megapixel (1280 x 960) resolution
- 120dB Wide Dynamic Range
- True Day/Night
- Low Illumination
- HD 720P realtime video
- IP66 rating
- High-performance IR LED

Dimensions

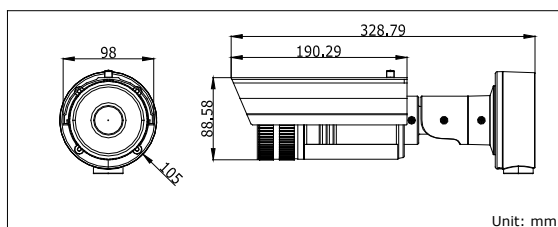

Specifications

	DS-2CD8264FWD-EI(S)
Camera	
Image Sensor	1/3" Progressive CMOS
Min. Illumination	0.01 Lux @ (F1.2, AGC ON) 0 Lux with IR
Shutter Time	1/25 s to 1/100,000 s
Lens	2.7 - 9 mm @ F1.2 Angle of view: 101° - 30.4°
Lens Mount	Φ 14
Auto Iris	DC drive
Day & Night	IR cut filter with auto switch
Wide Dynamic Range	120dB
Compression Standard	
Video Compression	H.264/MPEG4/MJPEG
Bit Rate	32 Kbps – 16 Mbps
Dual Stream	Yes
Image	
Max. Image Resolution	1280 × 960
Frame Rate	50Hz: 25fps (1280 × 960), 25fps (1280 × 720) 60Hz: 30fps (1280 × 960), 30fps (1280 × 720)
Image Setting	Saturation, Brightness, Contrast adjustable through client software or web browser
Network	
Network Storage	NAS (iSCSI optional)
Alarm Trigger	Motion detection, Network disconnect, IP address conflict, Storage exception
Protocols	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP/RTSP, PPPoE, SMTP, NTP (SNMP, HTTPS, FTP, SIP, 802.1x, IPv6 optional)
Security	Password protection, Watermark
Interface	
Communication Interface	1 RJ45 10 M/100 M Ethernet interface
Local Storage	Built-in SD/SDHC slot, up to 32 GB
General	
Operating Conditions	-10 °C - 60 °C (14°F – 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12V DC ± 10% PoE (802.3af)
Power Consumption	Max. 10.5W
Weather Proof Rating	IP66
IR Range	Approx 20 to 30 meters
Dimensions	98 × 88.58 × 328.79 mm
Weight	1.7kg (3.75 lbs)

Available Models

DS-2CD8264FWD-EI, DS-2CD8264FWD-EIS

* "-S" is equipped with audio interface, alarm interface and RS-485 interface.