



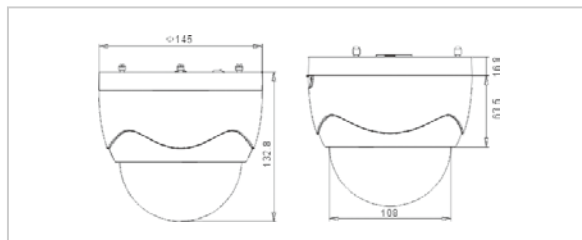

DS-2CD702/712/792PF (NF)(-E) Network Dome Camera

- High performance Sony CCD
- Linux OS embedded
- TI DaVinci hardware compression
- H.264 / MPEG-4 dual stream real time video compression in 4CIF/DCIF/2CIF/CIF/QCIF
- Up to 32 GB SD/SDHC card local storage
- Support IE and client software for network preview
- 3-Axis Adjustment
- Conforms to ONVIF

Unit: mm

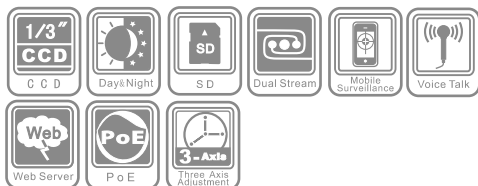

Specifications

		DS-2CD702PF(NF)-E	DS-2CD712PF(NF)-E
Camera	Image Sensor	1/3" SONY CCD	
	Signal System	PAL/NTSC	
	Min. Illumination	0.1 Lux @ (F1.2, AGC ON)	
	Shutter Time	1/50 (1/60) s to 1/100,000 s	
	Lens	3.5 - 9 mm @ F1.2 Angle of view: 80° - 30°	
	Lens Mount	Φ14	
	Auto Iris	---	
	Angle Adjustment	Pan: 0 - 355°, Tilt: 0 - 75°, Rotation: 0 - 180°	
	Day & Night	Electronic	
Compression Standard	Horizontal Resolution	420 TVL	480 TVL
	Video Compression	H.264 (MPEG-4 optional)	
	Bit Rate	32 Kbps - 8 Mbps	
	Audio Compression	OggVorbis	
Image	Dual Stream	Yes	
	Max. Image Resolution	PAL: 704 × 576 NTSC: 704 × 480	
	Frame Rate	50 Hz: 25 fps (704 × 576) 60 Hz: 30 fps (704 × 480)	
	Image Settings	Saturation, Brightness, Contrast adjustable through client software or web browser	
Network	Local Storage	Built-in SD/SDHC slot	
	Alarm Trigger	Motion detection	
	Protocols	TCP/IP, HTTP, DHCP, DNS, RTP/RTSP, PPPoE (FTP, SMTP, NTP, SNMP optional)	
Interface	Security	Password protection	
	Audio Input	1-ch, 3.5 mm audio interface (2.0 - 2.4 Vp-p, 1 kΩ)	
	Audio Output	1-ch, 3.5 mm audio interface (Line level, 600 Ω)	
	Communication Interface	1 RJ45 10 M/100 M Ethernet port and 1 RS-485 interface	
	Alarm Input	1	
	Alarm Output	1	
	Video Output	1Vp-p composite output (75 Ω/BNC)	
	Operating Conditions	-10 °C - 60 °C (14 °F - 140 °F); Humidity 90% or less (non-condensing)	
	Power Supply	12 V DC ± 10%; PoE	
	Power Consumption	Max. 4 W	
	Dimension	Φ 145 × 132.8 mm (Φ 5.71" × 5.23")	
	Weight	900 g (1.98 lbs)	

Available Models

DS-2CD702PF-E, DS-2CD712PF-E, DS-2CD702NF-E, DS-2CD712NF-E