




DS-2CD727 / 728PF-PT(W) Pan & Tilt Network Camera

- H.264 video compression
- Real-time video at 4CIF resolution
- Dual Stream
- Two-way audio
- 200 Presets
- 20°/s Pan and Tilt Preset Speed
- Up to 32 GB SD/SDHC card local storage

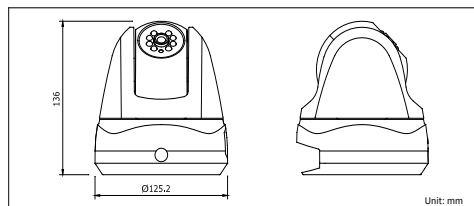

Specifications

DS-2CD727 / 728PF-PT(W)		
Camera	Image Sensor	1/3" SONY CCD
	Signal System	PAL
	Min. Illumination	0.1Lux @ (F1.2,AGC ON), 0 Lux with IR 0.2Lux @ (F2.0,AGC ON), 0 Lux with IR
	Lens	3.6mm@F1.8
		Angle of view: 70.6°
	Lens Mount	M12
Compression Standard	Day & Night	Electronic
	Infrared Function	Support
	Video Compression	H.264
Image	Video Output	32 K - 8M
	Audio Compression	OggVorbis
	Max. Image Resolution	704 × 576
Network	Frame Rate	25fps (704 × 576)
	Image Setting	Saturation, Brightness, Contrast, Hue adjustable through client software or web browser
	Protocols	TCP / IP, HTTP, DHCP, DNS, RTP / RTCP, PPPoE (FTP, SMTP, NTP, SNMP addible)
	Security	Password Protection
	Privacy Protection	Prevent Previewing through Network, just Preview on the Monitor.
	Scan Mode	Cameras controlled by the client software or remote control can scan ≤170°range
	Pan and Tilt Range	Pan: 0-170°;Tilt: 0-90°
	Horizontal Speed	0 - 20°/s(adjustable)
	Vertical Speed	0 - 20°/s(adjustable)
	Pan and Tilt Preset Speed	20°/s
	RS-485 Protocols	HIKVISION, PELCO-P/D (addible)
	Number of Preset	200
	Menu Language	Chinese and English, 16 characters
	Mouse Control	Support Mouse Drag while select HIKVISION protocol in Client Software
	Motion Detect	Support
Interface	Dual Stream	Support
	SD Card Local Recording	Support
	Heartbeat	Support
	Voice Input	2channels ,1 channel 3.5mm audio interface (2.0 - 2.4Vp-p,1kΩ) and MIC internal channel.
	Voice Output	1 channel 3.5mm audio interface (Line level, 600Ω)
	Communication	1 RJ45 10M / 100M self-adaptive Ethernet port , 1 RS-485 interface (802.11g WLAN optional, IR Remoter optional)
General	Alarm Input	2 channels signal input
	Alarm Output	1 channel relay output
	Video Output	Test Monitor OUT 1Vp-p Composite Output (75Ω/BNC)
	Reset Button	Yes
	Operating Conditions	-10°C-60° C(14°F-140°F),Humidity 90% or less(non-condensing)
	Power Supply	12V DC, ±10%
	Power Consumption	9W MAX
	Dimension	Φ125.2 × 136 mm (Φ4.93" × 5.35")
	Weight	450g (0.99lbs)

Available Models

DS-2CD726F-PT, DS-2CD726F-PTW, DS-2CD727PF-PT, DS-2CD727PF-PTW, DS-2CD728PF-PT, DS-2CD728PF-PTW