





DS-2CD732F(-E) IP Dome Camera

- Linux OS embedded
- TI DaVinci hardware compression
- H.264 / MPEG-4 dual stream real time video compression in 4CIF/DCIF/2CIF/CIF/QCIF
- SDHC card local storage
- Support IE client for network preview
- Motion detection with PC client notification

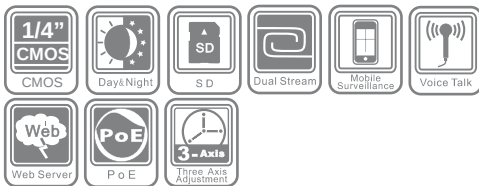

Unit: mm

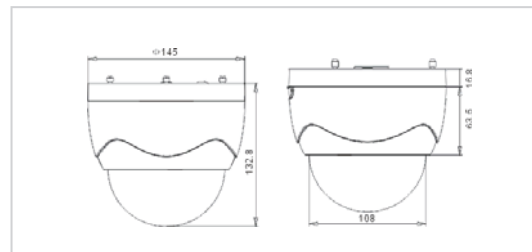

Specifications

		DS-2CD732F-E
Camera	Image Sensor	1/4 inch CMOS
	Effective Pixels	640 (H) × 480 (V)
	Min. Illumination	0.4Lux @ F1.2
	Day&Night	Electronic
	Lens	3.5-8mm @ F1.6 / M12 / manual Iris lens
Compression Standard	Video Output	1Vp-p Composite Output (75Ω/BNC)
	Video Compression	H.264 or MPEG-4
	Video Bit Rate	32 K ~ 2M, adjustable (8Mbps maximum)
Image	Audio Compression	OggVorbis
	Image Resolution	704 × 576, 640 × 480, 528 × 384, 704 × 288, 352 × 288, 176 × 144
	Frame Rate	25fps (704 × 576)
Functions	Motion Detection	Support
	Dual Stream	Support
	SD Card Local Recording	Support
	Heartbeat	Support
	Password Protection	Support
Interface	Protocols	TCP/IP,HTTP,DHCP,DNS,RTP/RTCP, PPPoE (FTP, SMTP, NTP, SNMP addible)
	Audio Input	1 channel (2.0 ~ 2.4Vp-p,1kΩ)
	Audio Output	1 channel (Line level, 600Ω)
	Communication	1 RJ45 10M / 100M self-adaptive Ethernet port and 1 RS-485 interface
	Alarm Input	1 channel signal input
General	Alarm Output	1 channel signal relay output
	Power Supply	12VDC, ±10%, (-E) series support PoE (Power over Ethernet)
	Power Consumption	3W MAX
	Working Temperature	-10°C ~ 60°C
	Dimensions	Φ145 × 132.8 (Φ5.75" × 5.26")
	Weight	900g (1.98lbs)