

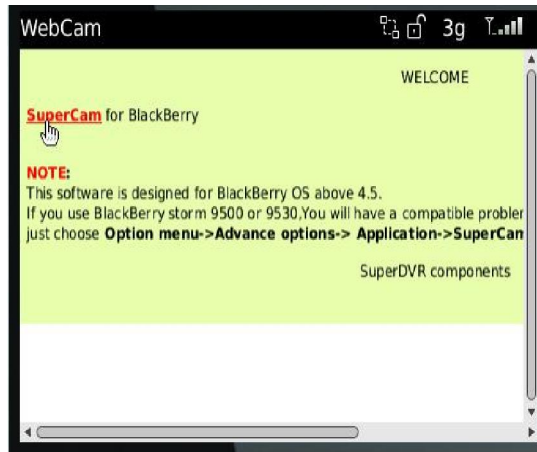
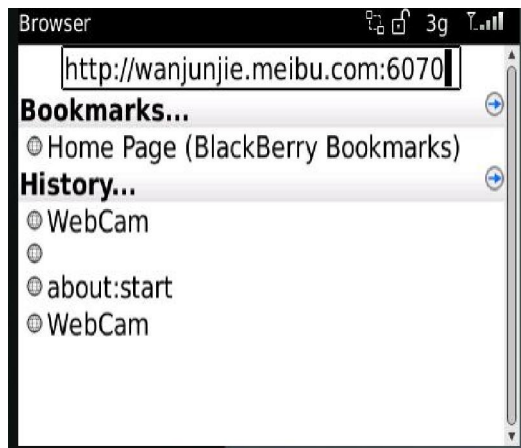


## Appendix 1 Installation instruction for SuperCam2.1.0 (BlackBerry)


Below link in the first picture is just a demo link in our test, please input your own DVR address in your phone.

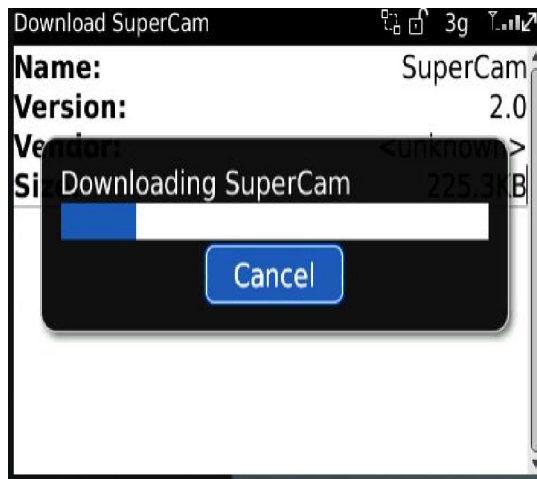

1. Open the browser of BlackBerry phone and enter sever address
2. Click "SuperCam" to link

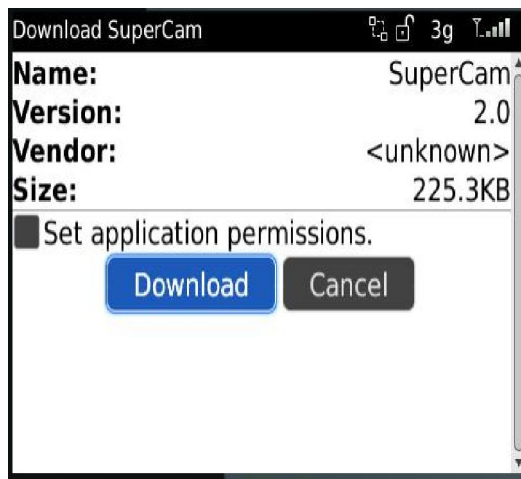

3. Click "Download" button on the popup interface and the download progress will be shown.

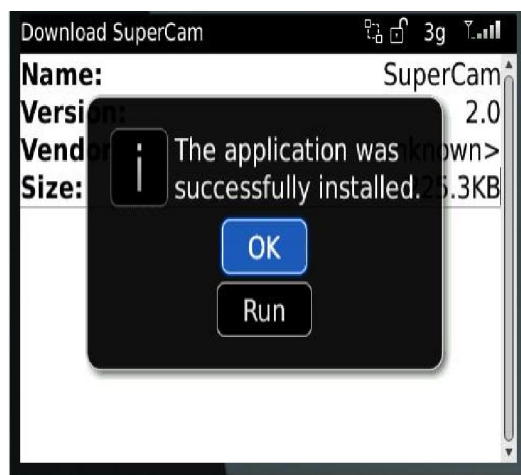


5. Finished downloading, the software will be installed automatically.

If the software fails to download, please check in accordance with the following steps:

1. check whether the network of mobile phone is normal or not
2. check whether DVR server connect network normally or not
3. Modify the option of Browser Configuration.
  - 1) Enter into Menu->Option->Browser Configuration; configure referring to the following figure.



- 2) Enter into Menu->Option->Cache Operations, clear up browser cache.

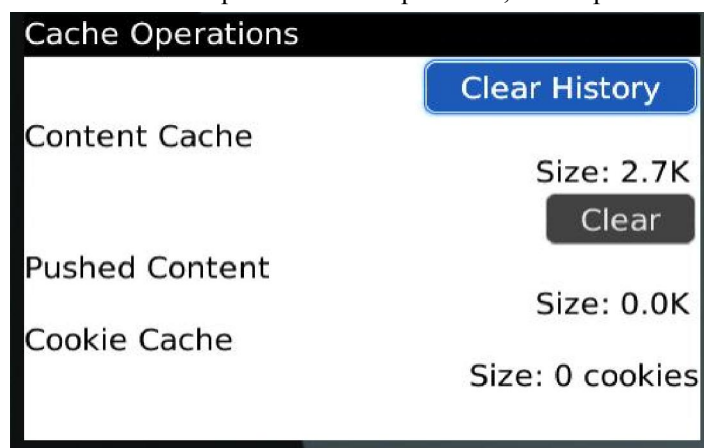


If the SuperCam software is used in mobile phone with touch screen, there will be compatible problem.

Solution:

Enter into Options Menu->Advance options->Applications->SuperCam and click "Disable Compatibility" button. This problem will be solved.

## 1. Login

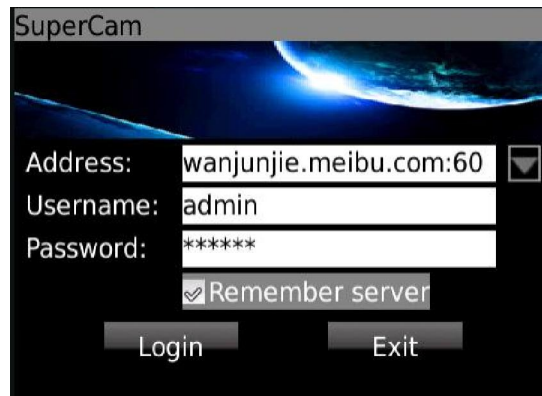

Enter server's IP address (or domain name), user's ID and password.

Click "Remember server" to save the setting; click ▼ button can quick input saved server address, user name and password.

## 2. Main interface



<b>【Playback】</b>	playback record file	<b>【Image】</b>	image view	<b>【Live】</b>	live view
<b>【Log】</b>	log record	<b>【Server List】</b>	device list	<b>【Settings】</b>	software setting
<b>【Information】</b>	device information view	<b>【Help】</b>	software help center	<b>【Logoff】</b>	logoff and return to login interface

## 3. Live view





Mark 1	Current viewing channel	Mark 2	Channel status
	Switch channels		PTZ, click to switch to Fig 2 interface
	Snap		Full screen
	Background alarm		Stop rotates the PTZ
	Upward rotates the PTZ		Downward rotates the PTZ
	Upward rotates the PTZ		Downward rotates the PTZ
	Zoom In/Focus In/Iris Add		Zoom Out/Focus Out/Iris Sub
Preset	Select the preset point	Group	Set the cruise line


### 3. Server list



【Add】 Add a server list

- 【Modify】      Modify a server list  
【Delete】     delete a server list

#### 4. Software configuration

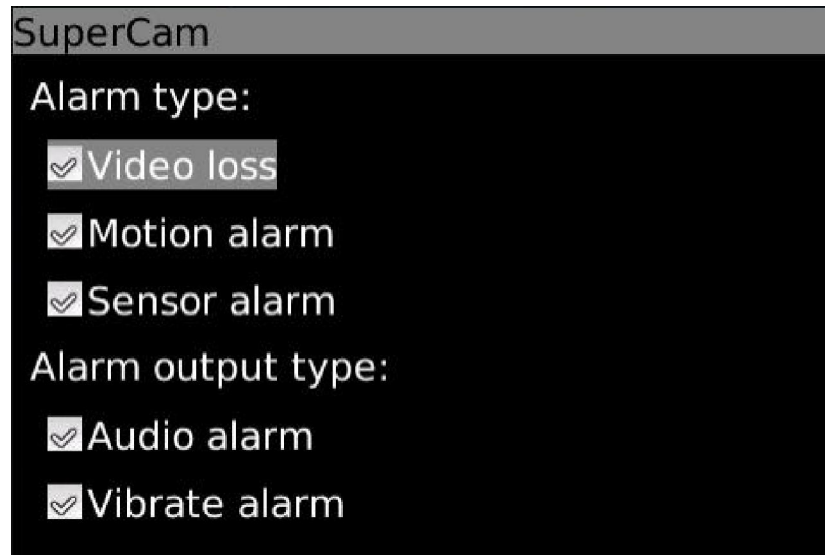

Alarm type: Setup the type of background alarm (Video Loss/Sensor/Motion)

Alarm output type: Setup prompt type of background alarm (sound alarm/vibrate alarm)

#### 6. Information view



##### Device:

Device Name: name of the current device.

**Device ID:** the current connection device ID

**Software version:** The current connection device software version

**Build date:** the current connection device build date

##### Phone:

**Software version:** The current use of mobile phone software version

**Software build date:** the current use of mobile phone software version