



# **Network Camera**

## **User Manual**

**V4.0.3**



Hikvision Digital Technology Co., Ltd.

<http://www.hikvision.com>

This manual is applied to the following camera models:

Type	Model
Box camera III	DS-2CD883F-E(W), DS-2CD855F-E, DS-2CD854F(WD)-E(W), DS-2CD853F-E(W), DS-2CD864F(WD)-E(W), DS-2CD863PF(NF)-E(W), DS-2CD893PFW(NFWD)-E(W), DS-2CD833F-E(W), DS-2CD893PF(NF)-E(W)
Dome camera III	DS-2CD733F-E(I)(Z), DS-2CD793PF(NF)-E(I)(Z), DS-2CD793PFW(NFWD)-E(I)(Z), DS-2CD763PF(NF)-E(I)(Z), DS-2CD764FWD-E(I)(Z), DS-2CD764F-E(I)(Z), DS-2CD753F-E(I)(Z), DS-2CD754F-E(I)(Z), DS-2CD754FWD-E(I)(Z)(B), DS-2CD783F-E(I)(Z), DS-2CD755F-E(I)(Z)
Dome camera IV	DS-2CD7233F-E(I)Z(H)(S), DS-2CD7253F-E(I)Z(H)(S), DS-2CD7254F-E(I)Z(H)(S), DS-2CD7254FWD-E(I)Z(H)(S), DS-2CD7255F-E(I)Z(H)(S), DS-2CD7283F-E(I)Z(H)(S), DS-2CD7293PFW(NFWD)-E(I)Z(H)(S), DS-2CD7263NF(PF)-E(I)Z(H)(S), DS-2CD7264FWD-E(I)Z(H)(S), DS-2CD7293PF(NF)-E(I)Z(H)(S)
Bullet Camera I	DS-2CD8253F-E(I)Z(S), DS-2CD8233F-E(I)Z(S), DS-2CD8264FWD-E(I)Z(S), DS-2CD8264F-E(I)Z(S), DS-2CD8254F-E(I)Z(S), DS-2CD8254FWD-E(I)Z(S), DS-2CD8283F-E(I)Z(S), DS-2CD8255F-E(I)Z(S)
Bullet Camera II	DS-2CD833-EI3, DS-2CD864-EI3, DS-2CD855-EI3
Cube Camera I	DS-2CD8133F-E(I)(W), DS-2CD8153F-E(I)(W)
Cube Camera II	DS-2CD8464F-E(I)(W), DS-2CD8433F-E(I)(W)
Mini Dome Camera	DS-2CD7164-E, DS-2CD7153-E, DS-2CD7133-E

Thank you for purchasing our product. If there are any questions, or requests, please do not hesitate to contact the dealer.

This manual applies to Network Camera.

This manual may contain several technical incorrect places or printing errors, and the content is subject to change without notice. The updates will be added to the new version of this manual. We will readily improve or update the products or procedures described in the manual.

#### DISCLAIMER STATEMENT

“Underwriters Laboratories Inc. (“UL”) has not tested the performance or reliability of the security or signaling aspects of this product. UL has only tested for fire, shock or casualty hazards as outlined in UL’s Standard(s) for Safety, UL60950-1. UL Certification does not cover the performance or reliability of the security or signaling aspects of this product. UL MAKES NO REPRESENTATIONS, WARRANTIES OR CERTIFICATIONS WHATSOEVER REGARDING THE PERFORMANCE OR RELIABILITY OF ANY SECURITY OR SIGNALING RELATED FUNCTIONS OF THIS PRODUCT.”



## Regulatory Information

### FCC Information

**FCC compliance:** This equipment has been tested and found to comply with the limits for a digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

### FCC Conditions

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

### EU Conformity Statement



This product and - if applicable - the supplied accessories too are marked with "CE" and comply therefore with the applicable harmonized European standards listed under the Low Voltage Directive 2006/95/EC, the EMC Directive 2004/108/EC.



2002/96/EC (WEEE directive): Products marked with this symbol cannot be disposed of as unsorted municipal waste in the European Union. For proper recycling, return this product to your local supplier upon the purchase of equivalent new equipment, or dispose of it at designated collection points. For more information see: [www.recyclethis.info](http://www.recyclethis.info).



2006/66/EC (battery directive): This product contains a battery that cannot be disposed of as unsorted municipal waste in the European Union. See the product documentation for specific battery information. The battery is marked with this symbol, which may include lettering to indicate cadmium (Cd), lead (Pb), or mercury (Hg). For proper recycling, return the battery to your supplier or to a designated collection point. For more information see: [www.recyclethis.info](http://www.recyclethis.info).

## Safety Warnings and Cautions

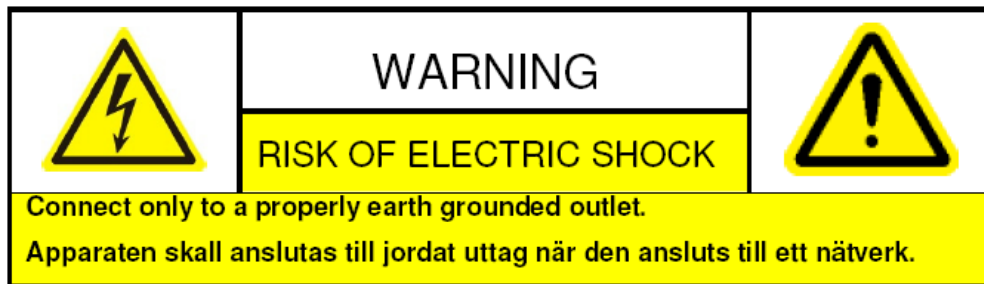
Please pay attention to the following warnings and cautions:



**Hazardous Voltage may be present:** Special measures and precautions must be taken when using this device. Some potentials (voltages) on the device may present a hazard to the user. This device should only be used by employees from our company with knowledge and training in working with these types of devices that contain live circuits.



**Power Supply Hazardous Voltage:** AC mains voltages are present within the power supply assembly. This device must be connected to a UL approved, completely enclosed power supply, of the proper rated voltage and current. **No user serviceable parts inside the power supply.**

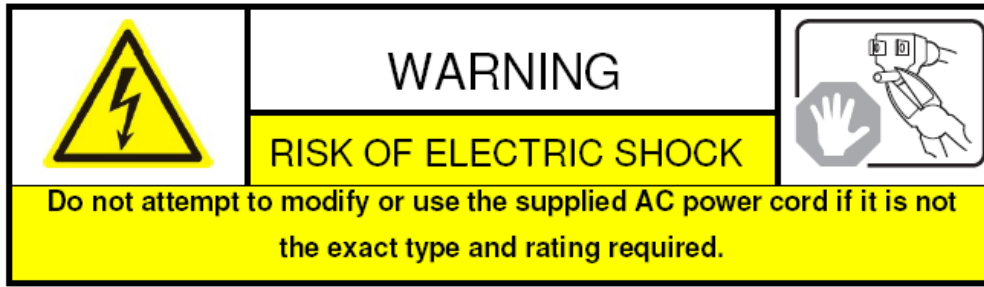


**System Grounding (Earthing):** To avoid shock, ensure that all AC wiring is not exposed and that the earth grounding is maintained. Ensure that any equipment to which this device will be attached is also connected to properly wired grounded receptacles and are approved medical devices.



**Power Connect and Disconnect:** The AC power supply cord is the main disconnect device to mains (AC power). The socket outlet shall be installed near the equipment and shall be readily accessible.

**Installation and Maintenance:** Do not connect/disconnect any cables to or perform installation/maintenance on this device during an electrical storm.



**Power Cord Requirements:** The connector that plugs into the wall outlet must be a grounding-type male plug designed for use in your region. It must have certification marks showing certification by an agency in your region. The connector that plugs into the AC receptacle on the power supply must be an IEC 320, sheet C13, female connector. See the following website for more information

<http://kropla.com/electric2.htm>.



**Lithium Battery:** This device contains a Lithium Battery. There is a risk of explosion if the battery is replaced by an incorrect type. Dispose of used batteries according to the vendor's instructions and in accordance with local environmental regulations.

**Perchlorate Material:** Special handling may apply. See [www.dtsc.ca.gov/hazardouswaste/perchlorate](http://www.dtsc.ca.gov/hazardouswaste/perchlorate). This notice is required by California Code of Regulations, Title 22, Division 4.5, Chapter 33: Best Management Practices for Perchlorate Materials. This device includes a battery which contains perchlorate material.

**Taiwan battery recycling:**



Please recycle batteries.




**Thermal and Mechanical Injury:** Some components such as heat sinks, power regulators, and processors may be hot; care should be taken to avoid contact with these components.

**Electro Magnetic Interference:** This equipment has not been tested for compliance with emissions limits of FCC and similar international regulations. This device is not, and may not be, offered for sale or lease, or sold, or leased until authorization from the United States FCC or its equivalent in other countries has been obtained. Use of this equipment in a residential location is prohibited. This equipment generates, uses and can radiate radio frequency energy which may result in harmful interference to radio communications. If this equipment does cause harmful interference to radio or television reception, which can be

determined by turning the equipment on and off, the user is required to take measures to eliminate the interference or discontinue the use of this equipment.

**Lead Content:**



Please recycle this device in a responsible manner. Refer to local environmental regulations for proper recycling; do not dispose of device in unsorted municipal waste.



## Safety Instruction

These instructions are intended to ensure that the user can use the product correctly to avoid danger or property loss.

The precaution measure is divided into 'Warnings' and 'Cautions':

**Warnings:** Serious injury or death may be caused if any of these warnings are neglected.

**Cautions:** Injury or equipment damage may be caused if any of these cautions are neglected.

	
<b>Warnings</b> Follow these safeguards to prevent serious injury or death.	<b>Cautions</b> Follow these precautions to prevent potential injury or material damage.



### Warnings:

- Please adopt the power adapter which can meet the safety extra low voltage (SELV) standard. And source with DC 12V or AC 24V (depending on models) according to the IEC60950-1 and Limited Power Source standard.
- If the product does not work properly, please contact your dealer or the nearest service center. Never attempt to disassemble the camera yourself. (We shall not assume any responsibility for problems caused by unauthorized repair or maintenance.)
- To reduce the risk of fire or electrical shock, do not expose this product to rain or moisture.
- This installation should be made by a qualified service person and should conform to all the local codes.
- Please install blackouts equipment into the power supply circuit for convenient supply interruption.
- Please make sure that the ceiling can support more than 50(N) Newton gravities if the camera is fixed to the ceiling.
- If the product does not work properly, please contact your dealer or the nearest service center. Never attempt to disassemble the camera yourself. (We shall not assume any responsibility for problems caused by unauthorized repair or maintenance.)



**Cautions:**

- Make sure the power supply voltage is correct before using the camera.
- Do not drop the camera or subject it to physical shock.
- Do not touch sensor modules with fingers. If cleaning is necessary, use a clean cloth with a bit of ethanol and wipe it gently. If the camera will not be used for an extended period of time, put on the lens cap to protect the sensor from dirt.
- Do not aim the camera lens at the strong light such as sun or incandescent lamp. The strong light can cause fatal damage to the camera.
- The sensor may be burned out by a laser beam, so when any laser equipment is being used, make sure that the surface of the sensor not be exposed to the laser beam.
- Do not place the camera in extremely hot, cold temperatures (the operating temperature should be between -10°C ~ 60°C), dusty or damp environment, and do not expose it to high electromagnetic radiation.
- To avoid heat accumulation, good ventilation is required for a proper operating environment.
- Keep out of water and any liquid.
- While shipping, the camera should be packed in its original packing.
- Improper use or replacement of the battery may result in hazard of explosion. Please use the manufacturer recommended battery type.

# Table of Contents

<b>CHAPTER 1</b>	<b>SYSTEM REQUIREMENT .....</b>	<b>11</b>
<b>CHAPTER 2</b>	<b>NETWORK CONNECTION .....</b>	<b>12</b>
2.1	SETTING THE NETWORK CAMERA OVER THE LAN .....	12
2.1.1	<i>Wiring over the LAN .....</i>	<i>12</i>
2.1.2	<i>Detecting and Changing the IP Address .....</i>	<i>13</i>
2.2	SETTING THE NETWORK CAMERA OVER THE WAN .....	14
2.2.1	<i>Static IP Connection .....</i>	<i>14</i>
2.2.2	<i>Dynamic IP Connection .....</i>	<i>15</i>
<b>CHAPTER 3</b>	<b>ACCESS TO THE NETWORK CAMERA .....</b>	<b>17</b>
3.1	ACCESSING BY WEB BROWSERS .....	17
3.2	ACCESSING BY CLIENT SOFTWARE .....	19
3.2.1	<i>Installing iVMS-4200 Software .....</i>	<i>19</i>
3.2.2	<i>Installing iVMS-4500 Software .....</i>	<i>20</i>
<b>CHAPTER 4</b>	<b>WI-FI SETTINGS .....</b>	<b>21</b>
4.1	CONFIGURING WI-FI CONNECTION IN MANAGE AND AD-HOC MODES .....	21
4.2	EASY WI-FI CONNECTION WITH WPS FUNCTION .....	25
4.3	IP PROPERTY SETTINGS FOR WIRELESS NETWORK CONNECTION .....	28
<b>CHAPTER 5</b>	<b>LIVE VIEW .....</b>	<b>29</b>
5.1	LIVE VIEW PAGE .....	29
5.2	STARTING LIVE VIEW .....	30
5.3	RECORDING AND CAPTURING PICTURES MANUALLY .....	31
5.4	OPERATING PTZ CONTROL .....	31
5.4.1	<i>PTZ Control Panel .....</i>	<i>32</i>
5.4.2	<i>Setting / Calling a Preset .....</i>	<i>32</i>
5.5	CONFIGURING LIVE VIEW PARAMETERS .....	33
<b>CHAPTER 6</b>	<b>NETWORK CAMERA CONFIGURATION .....</b>	<b>34</b>
6.1	CONFIGURING LOCAL PARAMETERS .....	34
6.2	CONFIGURING TIME SETTINGS .....	35
6.3	CONFIGURING NETWORK SETTINGS .....	37
6.3.1	<i>Configuring TCP/IP Settings .....</i>	<i>37</i>
6.3.2	<i>Configuring Port Settings .....</i>	<i>38</i>
6.3.3	<i>Configuring PPPoE Settings .....</i>	<i>39</i>
6.3.4	<i>Configuring DDNS Settings .....</i>	<i>39</i>
6.3.5	<i>Configuring SNMP Settings .....</i>	<i>41</i>
6.3.6	<i>Configuring 802.1X Settings .....</i>	<i>43</i>
6.3.7	<i>Configuring QoS Settings .....</i>	<i>43</i>
6.3.8	<i>Configuring FTP Settings .....</i>	<i>44</i>
6.3.9	<i>Configuring UPnP Settings .....</i>	<i>45</i>

6.4	CONFIGURING VIDEO AND AUDIO SETTINGS .....	45
6.4.1	Configuring Video Settings .....	45
6.4.2	Configuring Audio Settings .....	47
6.5	CONFIGURING IMAGE PARAMETERS .....	47
6.5.3	Configuring Display Settings .....	47
6.5.4	Configuring OSD Settings .....	49
6.5.5	Configuring Text Overlay Settings .....	50
6.5.6	Configuring Privacy Mask .....	51
6.6	CONFIGURING AND HANDLING ALARMS .....	52
6.6.7	Configuring Motion Detection .....	52
6.6.8	Configuring Tamper-proof Alarm .....	55
6.6.9	Configuring Video Loss Alarm .....	57
6.6.10	Configuring External Alarm Input .....	58
6.6.11	Configuring Alarm Output .....	59
6.6.12	Handling Exception .....	60
6.6.13	Configuring Email Settings .....	61
6.6.14	Configuring Snapshot Settings .....	62
6.6.15	Configuring Other Alarms .....	63
6.6.16	Arming or Disarming the Camera .....	68
<b>CHAPTER 7</b>	<b>STORAGE SETTINGS .....</b>	<b>70</b>
7.1	CONFIGURING NAS SETTINGS .....	70
7.2	CONFIGURING RECORDING SCHEDULE .....	71
<b>CHAPTER 8</b>	<b>PLAYBACK .....</b>	<b>76</b>
<b>CHAPTER 9</b>	<b>LOG SEARCHING .....</b>	<b>78</b>
<b>CHAPTER 10</b>	<b>OTHERS .....</b>	<b>79</b>
10.1	MANAGING USER ACCOUNTS .....	79
10.2	CONFIGURING RTSP AUTHENTICATION .....	81
10.3	VIEWING DEVICE INFORMATION .....	81
10.4	MAINTENANCE .....	82
10.4.1	Rebooting the Camera .....	82
10.4.2	Restoring Default Settings .....	82
10.4.3	Importing/Exporting Configuration File .....	83
10.4.4	Upgrading the System .....	83
10.5	RS-232 SETTINGS .....	84
10.6	RS-485 SETTINGS .....	85
<b>APPENDIX</b>	<b>.....</b>	<b>85</b>
APPENDIX 1	SADP SOFTWARE INTRODUCTION .....	85
APPENDIX 2	PORT MAPPING .....	88



# Chapter 1 System Requirement

**Operating System:** Microsoft Windows XP SP1 and above version / Vista / Win7 / Server 2003 / Server 2008 32bits

**CPU:** Intel Pentium IV 3.0 GHz or higher

**RAM:** 1G or higher

**Display:** 1024×768 resolution or higher

**Web Browser:** Internet Explorer 6.0 and above version, Apple Safari 5.02 and above version, Mozilla Firefox 3.5 and above version and Google Chrome8 and above versions.



## Chapter 2 Network Connection

### **Before you start:**

- If you want to set the network camera via a LAN (Local Area Network), please refer to *Section 2.1 Setting the Network Camera over the LAN*.
- If you want to set the network camera via a WAN (Wide Area Network), please refer to *Section 2.2 Setting the Network Camera over the WAN*.

### 2.1 Setting the Network Camera over the LAN

#### **Purpose:**

To view and configure the camera via a LAN, you need to connect the network camera in the same subnet with your computer, and install the SADP or iVMS-4200 software to search and change the IP of the network camera.

**Note:** For the detailed introduction of SADP, please refer to Appendix 1.

#### 2.1.1 Wiring over the LAN

The following figures show the two ways of cable connection of a network camera and a computer:

#### **Purpose:**

- To test the network camera, you can directly connect the network camera to the computer with a network cable as shown in Figure 2-1.
- Refer to the Figure 2-2 to set the network camera over the LAN via a switch or a router.

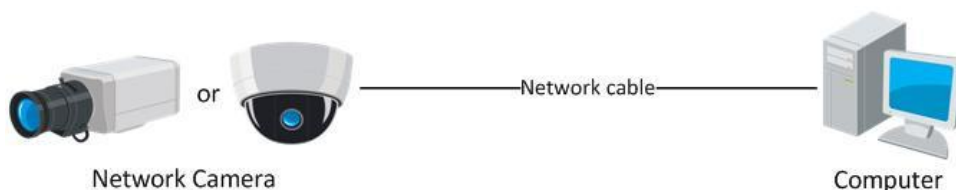


Figure 2-1 Connecting Directly

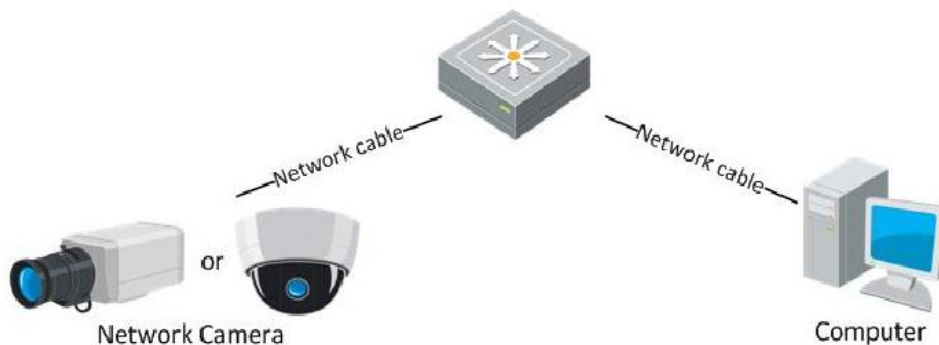


Figure 2-2 Connecting via a Switch or a Router

## 2.1.2 Detecting and Changing the IP Address

You need the IP address to visit the network camera.

### Steps:

- To get the IP address, you can choose either of the following methods:
  - ◆ Use SADP, a software tool which can automatically detect the online network cameras in the LAN and list the device information including IP address, subnet mask, port number, device serial number, device version, etc., shown in Figure 2-3.
  - ◆ Use the client software to list the online devices. Please refer to the user manual of client software for detailed information.
- Change the IP address and subnet mask to the same subnet as that of your computer.
- Enter the IP address of network camera in the address field of the web browser to view the live video.

### Notes:

- The default IP address is 192.0.0.64 and the port number is 8000. The default user name is admin, and password is 12345.
- For accessing the network camera from different subnets, please set the gateway for the network camera after you logged in. For detailed information, please refer to *Section 5.3.1 Configuring TCP/IP Settings*.

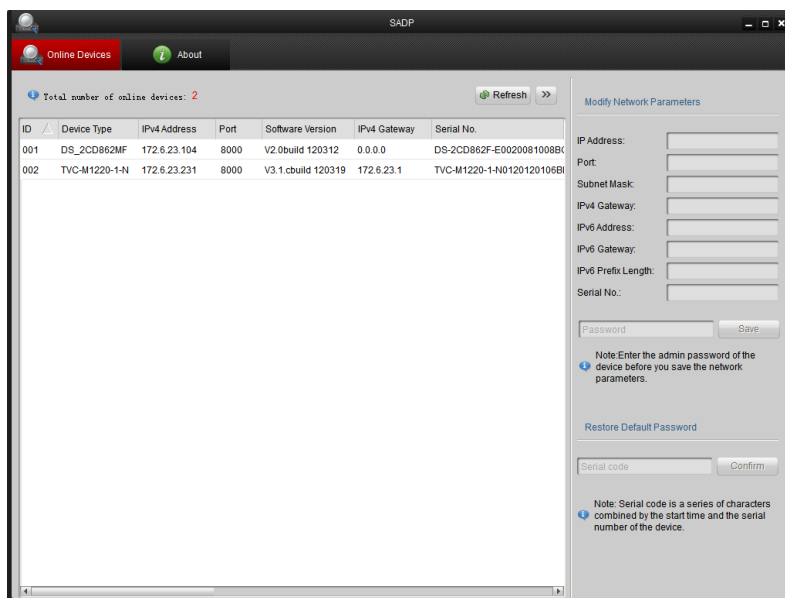


Figure 2-3 SADP Interface

## 2.2 Setting the Network Camera over the WAN

### **Purpose:**

This section explains how to connect the network camera to the WAN with a static IP or a dynamic IP.

### 2.2.1 Static IP Connection

#### **Before you start:**

Please apply a static IP from an ISP (Internet Service Provider). With the static IP address, you can connect the network camera via a router or connect it to the WAN directly.


#### ● **Connecting the network camera via a router**

##### **Steps:**

1. Connect the network camera to the router.
2. Assign a LAN IP address, the subnet mask and the gateway. Refer to *Section 2.1.2 Detecting and Changing the IP Address* for detailed IP address configuration of the camera.
3. Save the static IP in the router.
4. Set port mapping, E.g., 80, 8000, 8200 and 554 ports. The steps for port mapping vary depending on different routers. Please call the router manufacturer for assistance with port mapping.

**Note:** Refer to Appendix 2 for detailed information about port mapping.


5. Visit the network camera through a web browser or the client software over the internet.

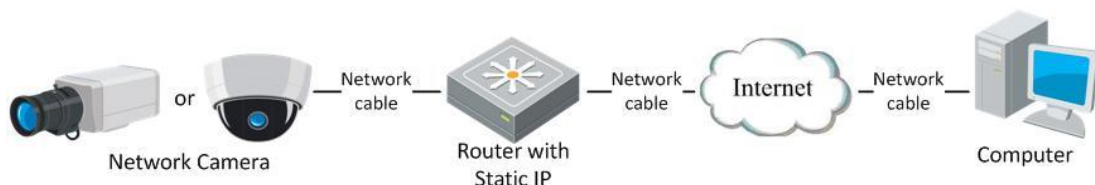

**Figure 2-4** Accessing the Camera through Router with Static IP

#### ● **Connecting the network camera with static IP directly**

You can also save the static IP in the camera and directly connect it to the internet without using a router. Refer to *Section 2.1.2 Detecting and Changing the IP Address* for detailed IP address configuration of the camera.

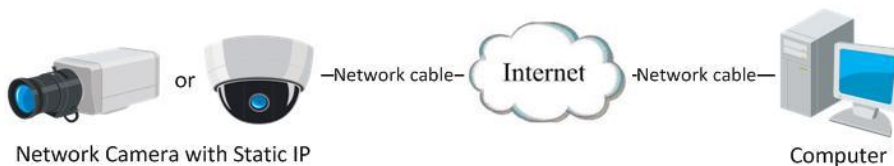

**Figure 2-5** Accessing the Camera with Static IP Directly

## 2.2.2 Dynamic IP Connection

### **Before you start:**

Please apply a dynamic IP from an ISP. With the dynamic IP address, you can connect the network camera to a modem or a router.

#### ● Connecting the network camera via a router

##### **Steps:**

1. Connect the network camera to the router.
2. In the camera, assign a LAN IP address, the subnet mask and the gateway. Refer to *Section 2.1.2 Detecting and Changing the IP Address* for detailed LAN configuration.
3. In the router, set the PPPoE user name, password and confirm the password.
4. Set port mapping. E.g. 80, 8000, 8200 and 554 ports. The steps for port mapping vary depending on different routers. Please call the router manufacturer for assistance with port mapping.


**Note:** Refer to Appendix 2 for detailed information about port mapping.

5. Apply a domain name from a domain name provider.
6. Configure the DDNS settings in the setting interface of the router.
7. Visit the camera via the applied domain name.

#### ● Connecting the network camera via a modem

##### **Purpose:**

This camera supports the PPPoE auto dial-up function. The camera gets a public IP address by ADSL dial-up after the camera is connected to a modem. You need to configure the PPPoE parameters of the network camera. Refer to *Section 5.3.3 Configuring PPPoE Settings* for detailed configuration.

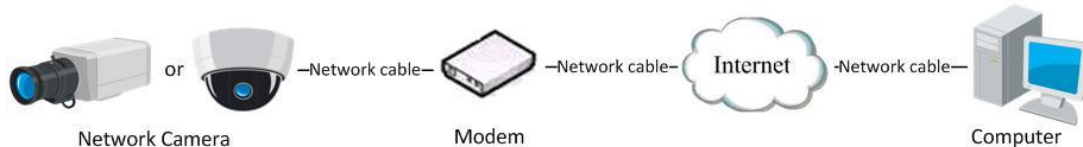


**Figure 2-6** Accessing the Camera with Dynamic IP

**Note:** The obtained IP address is dynamically assigned via PPPoE, so the IP address always changes after rebooting the camera. To solve the inconvenience of the dynamic IP, you need to get a domain name from the DDNS provider (E.g. DynDns.com). Please follow below steps for normal domain name resolution and private domain name resolution to solve the problem.

#### ◆ Normal Domain Name Resolution



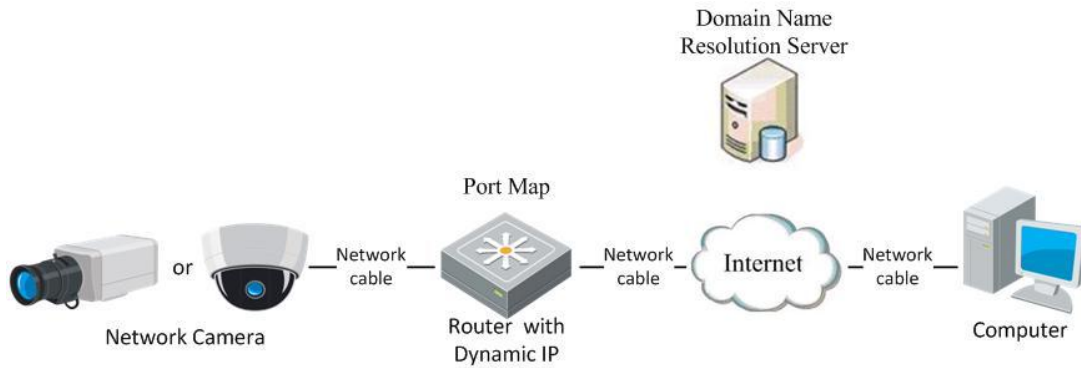


**Figure 2-7** Normal Domain Name Resolution

**Steps:**

1. Apply a domain name from a domain name provider.
2. Configure the DDNS settings in the **DDNS Settings** interface of the network camera. Refer to *Section 5.3.4 Configuring DDNS Settings* for detailed configuration.
3. Visit the camera via the applied domain name.

◆ Private Domain Name Resolution

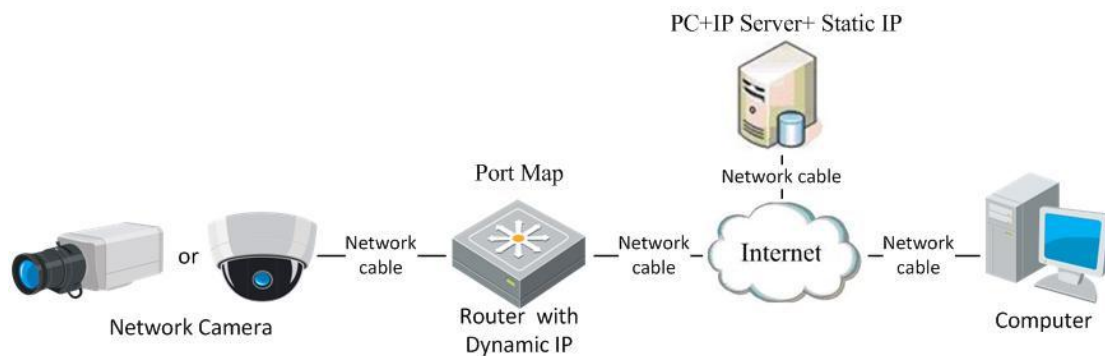

**Figure 2-8** Private Domain Name Resolution

**Steps:**

1. Install and run the IP Server software in a computer with a static IP.
2. Access the network camera through the LAN with a web browser or the client software.
3. Enable DDNS and select IP Server as the protocol type. Refer to *Section 5.3.4 Configuring DDNS Settings* for detailed configuration.

# Chapter 3 Access to the Network Camera

## 3.1 Accessing by Web Browsers

### *Before you start:*

Check the security level of the web browser and change it to Low. On the IE browser menu bar, navigate to **Tools > Internet Options > Security > Custom level** to customize the level to **Low**.

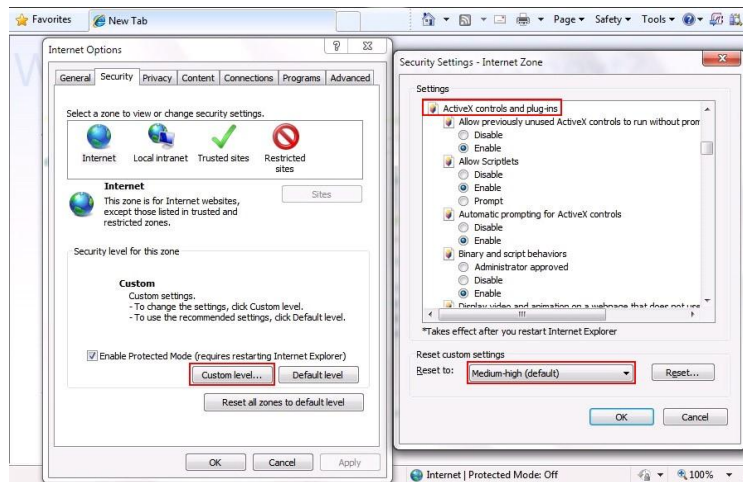

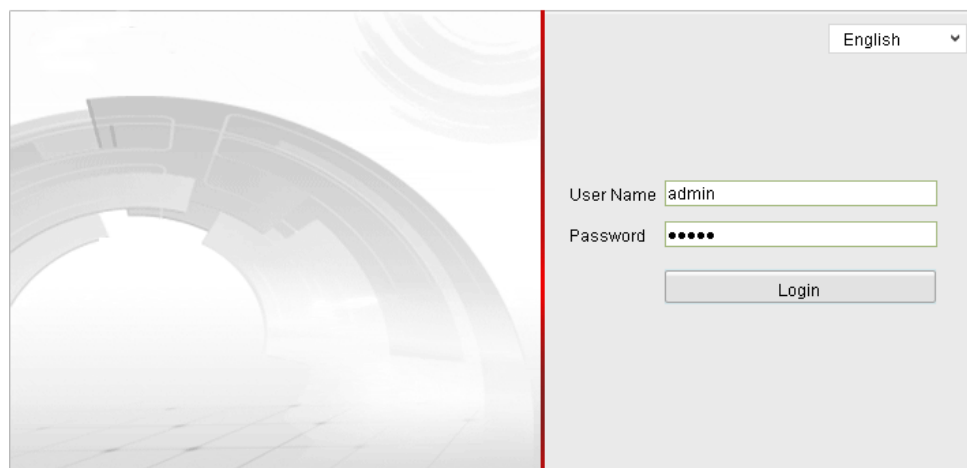


Figure 3-1 Adjust the Security Level

### *Steps:*

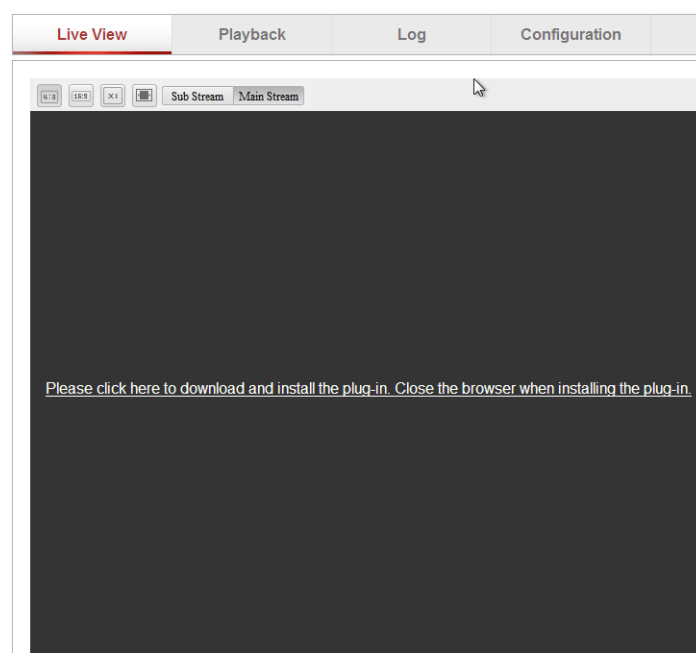
1. Open the web browser.
2. In the address field, input the IP address of the network camera, e.g., 192.0.0.64 and press the **Enter** key to enter the login interface.
3. Input the user name and password and click .

**Note:** The default user name is admin, password is 12345.

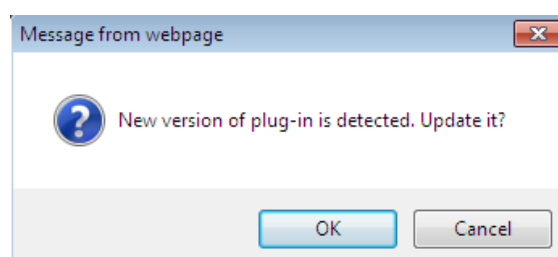


**Figure 3-2 Login Interface**

4. Install the plug-in before viewing the live video and operating the camera. Please follow the installation prompts to install the plug-in.



**Figure 3-3 Download and Install Plug-in**



**Figure 3-4 Install Plug-in (1)**

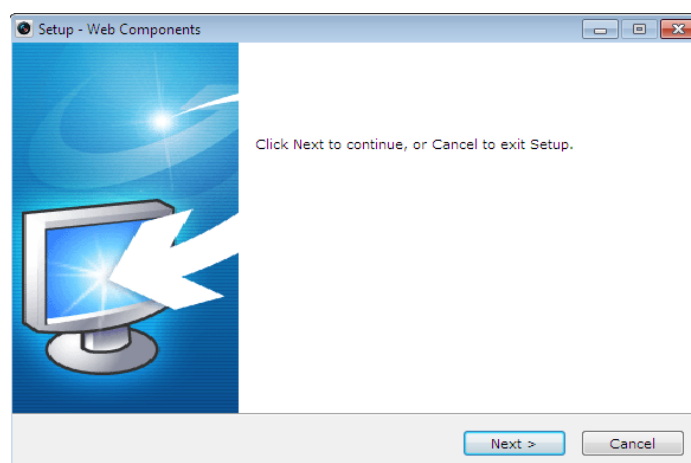


Figure 3-5 Install Plug-in (2)

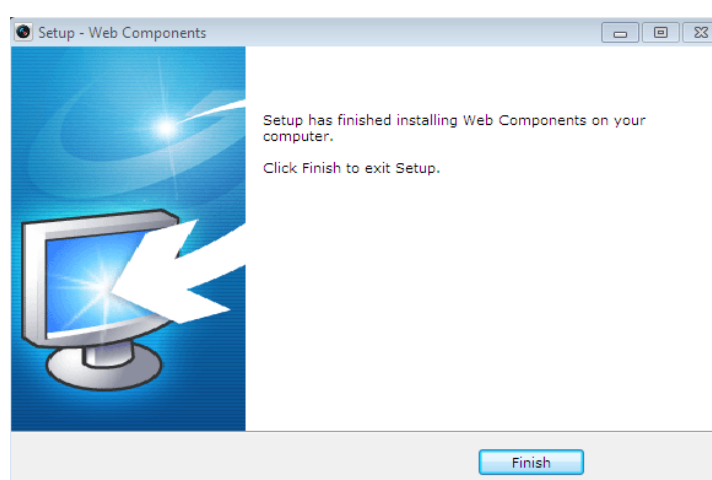


Figure 3-6 Install Plug-in (3)

**Note:** You may have to close the web browser to install the plug-in. Please reopen the web browser and log in again after installing the plug-in.

## 3.2 Accessing by Client Software

### 3.2.1 Installing iVMS-4200 Software

The product CD contains the iVMS-4200 client software. You can view the live video and manage the camera with the client software. You can also download the software from our website [www.hikvision.com](http://www.hikvision.com).

Follow the installation prompts to install the client software and WinPcap. The control panel and live view interface of iVMS-4200 are shown as bellow.

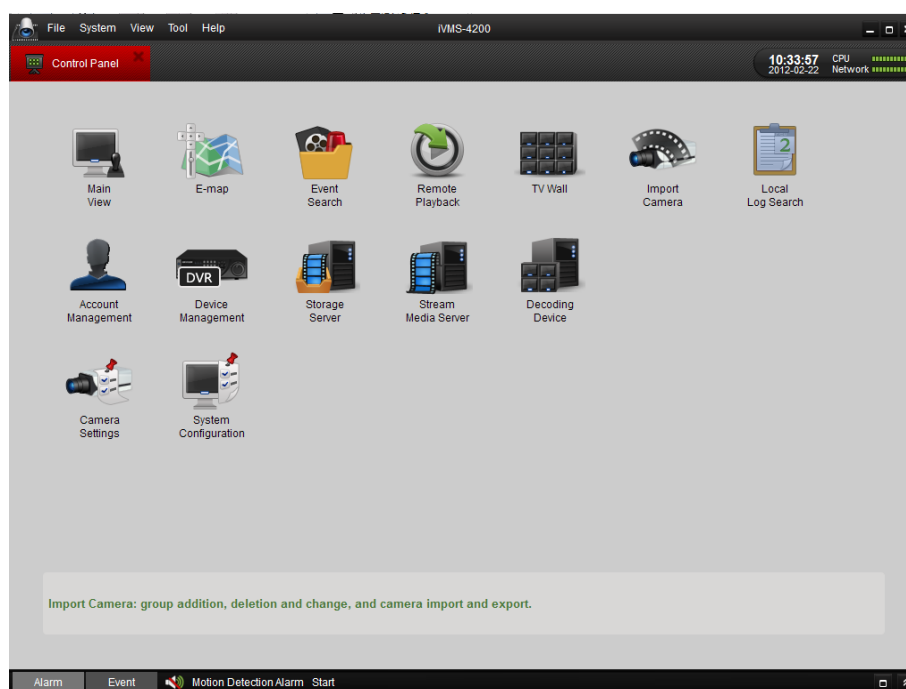


Figure 3-7 iVMS-4200 Control Panel

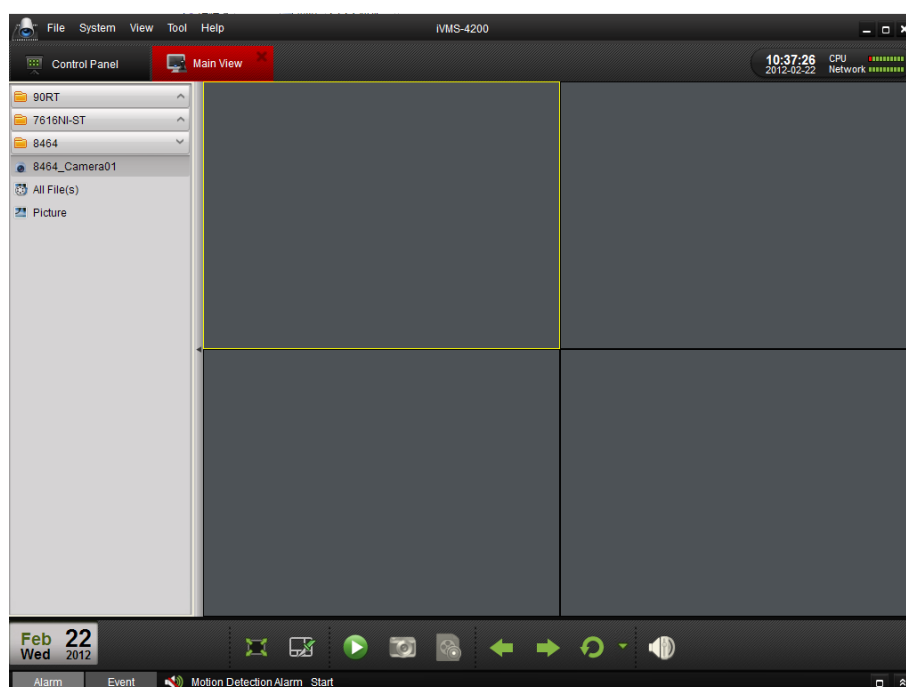


Figure 3-8 iVMS-4200 Live View Interface

**Note:** For detailed information about iVMS-4200 client software, please refer to the user manual of the iVMS-4200 software.

### 3.2.2 Installing iVMS-4500 Software

To view the camera with a mobile phone, install the iVMS-4500 client software in

your mobile phone. You can find the software in the CD in the package, and you can also download the software from our website [www.hikvision.com](http://www.hikvision.com).

**Note:** For detailed information about iVMS-4500 client software, please refer to the user manual of iVMS-4500 software.

## Chapter 4 Wi-Fi Settings

### **Purpose:**

By connecting to the wireless network, you don't need to use cable of any kind for network connection, which is very convenient for the actual surveillance application.

### **Note:**

This chapter is only applicable for the cameras with the Wi-Fi module built-in.

## 4.1 Configuring Wi-Fi Connection in Manage and Ad-hoc Modes

### **Before you start:**

A wireless network must be configured.

### **Wireless Connection in Manage Mode**


#### **Steps:**

1. Enter the Wi-Fi configuration interface.

**Configuration> Advanced Configuration> Network> Wi-Fi**

TCP/IP Port DDNS PPPoE SNMP QoS FTP Wi-Fi						
Wireless List						
No.	SSID	Working Mode	Security Mode	Channel	Signal Strength	Speed(Mbps)
1	belkin54g	infrastructure	NONE	1	94	54
2	Roy Zhong	infrastructure	WPA2-personal	1	78	54
3	yourPC	infrastructure	WPA2-personal	11	37	150
4	Micheal	infrastructure	WPA2-personal	6	31	150
5	APPLE	infrastructure	WPA2-personal	6	31	150

**Figure 4-1** Wireless Network List

2. Click  button to search the online wireless connections.
3. Click to choose a wireless connection on the list.

Wi-Fi	
SSID	<input type="text" value="belkin54g"/>
Network Mode	<input checked="" type="radio"/> Manager <input type="radio"/> Ad-Hoc
Security Mode	<input type="text" value="not-encrypted"/>

**Figure 4-2** Wi-Fi Setting- Manage Mode

4. Check the checkbox to select the *Network mode* as *Manage*, and the *Security mode* and the *Encryption Type* of the network is automatically shown when you select the wireless network, please don't change it manually.

**Note:** These parameters are exactly identical with those of the router.

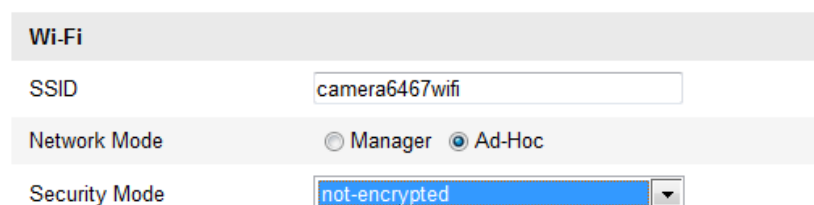
5. Enter the key to connect the wireless network. The key should be that of the wireless network connection you set on the router.

### Wireless Connection in Ad-hoc Mode

If you choose the Ad-hoc mode, you don't need to connect the wireless camera via a router. The scenario is the same as you connect the camera and the PC directly with a network cable.

#### Steps:

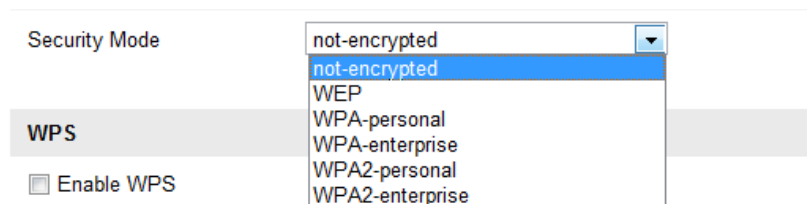
1. Choose Ad-hoc mode.



The image shows a configuration window titled "Wi-Fi". It contains three fields: "SSID" with the value "camera6467wifi", "Network Mode" with radio buttons for "Manager" and "Ad-Hoc" (where "Ad-Hoc" is selected), and "Security Mode" with a dropdown menu showing "not-encrypted".

**Figure 4-3** Wi-Fi Setting- Ad-hoc


2. Customize a SSID for the camera.
3. Choose the Security Mode of the wireless connection.



The image shows a configuration window titled "WPS" with a checkbox "Enable WPS" which is unchecked. To the right, a dropdown menu for "Security Mode" is open, showing a list of options: "not-encrypted", "not-encrypted", "WEP", "WPA-personal", "WPA-enterprise", "WPA2-personal", and "WPA2-enterprise". The first "not-encrypted" option is highlighted.

**Figure 4-4****Figure 4-5** Security Mode- Ad-hoc Mode

4. Enable the wireless connection function for your PC.
5. On the PC side, search the network and you can see the SSID of the camera listed.

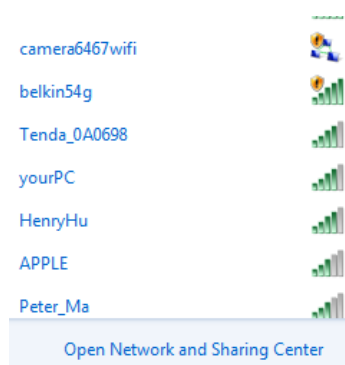

**Figure 4-6** Ad-hoc Connection Point

6. Choose the SSID and connect.

### Security Mode Description:

Wi-Fi	
SSID	belkin54g
Network Mode	<input checked="" type="radio"/> Manager <input type="radio"/> Ad-Hoc
Security Mode	<div> not-encrypted  not-encrypted  WEP  WPA-personal  WPA-enterprise  WPA2-personal  WPA2-enterprise </div>
<b>WPS</b> <input type="checkbox"/> Enable WPS	
PIN Code	99613013 <span>Generate</span>
<input checked="" type="radio"/> PBC connection <span>Connect</span>	

You can choose the Security Mode as not –encrypted, WEP, WPA-personal, WPA-enterprise, WPA2-personal, WPA2-enterprise.

WEP mode:

Wi-Fi	
SSID	belkin54g
Network Mode	<input checked="" type="radio"/> Manager <input type="radio"/> Ad-Hoc
Security Mode	WEP
Authentication	<input checked="" type="radio"/> Open <input type="radio"/> Shared
Key Length	<input checked="" type="radio"/> 64bit <input type="radio"/> 128bit
Key Type	<input type="radio"/> HEX <input type="radio"/> ASCII
Key 1 <input checked="" type="radio"/>	<input type="text"/>
Key 2 <input type="radio"/>	<input type="text"/>
Key 3 <input type="radio"/>	<input type="text"/>
Key 4 <input type="radio"/>	<input type="text"/>

- Authentication - Select Open or Shared Key System Authentication, depending on the method used by your access point. Not all access points have this option, in which case they probably use Open Sys-tem, which is sometimes known as SSID



Authentication.

- **Key length** - This sets the length of the key used for the wireless encryption, 64 or 128 bit. The encryption key length can sometimes be shown as 40/64 and 104/128.

- **Key type** - The key types available depend on the access point being used. The following options are available:

*HEX* - Allows you to manually enter the hex key.

*ASCII* - In this method the string must be exactly 5 characters for 64-bit WEP and 13 characters for 128-bit WEP.

WPA-personal and WPA2-personal Mode:

Enter the required Pre-shared Key for the access point, which can be a hexadecimal number or a passphrase.

Wi-Fi	
SSID	<input type="text" value="belkin54g"/>
Network Mode	<input checked="" type="radio"/> Manager <input type="radio"/> Ad-Hoc
Security Mode	<input type="text" value="WPA-personal"/>
Encryption Type	<input type="text" value="TKIP"/>
Key 1	<input type="text"/>

WPA- enterprise and WPA2-enterprise Mode:

Choose the type of client/server authentication being used by the access point; EAP-TLS or EAP-PEAP.

EAP-TLS

Wi-Fi	
SSID	<input type="text" value="test"/>
Network Mode	<input checked="" type="radio"/> Manager <input type="radio"/> Ad-Hoc
Security Mode	<input type="text" value="WPA-enterprise"/>
Authentication	<input type="text" value="EAP-TLS"/>
Identify	<input type="text"/>
Private key password	<input type="text"/>
EAPOL version	<input type="text" value="1"/>
CA certificate	<input type="text"/> <input type="button" value="Browse"/> <input type="button" value="Upload"/>
User certificate	<input type="text"/> <input type="button" value="Browse"/> <input type="button" value="Upload"/>
Private key	<input type="text"/> <input type="button" value="Browse"/> <input type="button" value="Upload"/>

- **Identity** - Enter the user ID to present to the network.
- **Private key password** – Enter the password for your user ID.
- **EAPOL version** - Select the version used (1 or 2) in your access point.
- **CA Certificates** - Upload a CA certificate to present to the access point for authentication.

EAP-PEAP:

- User Name - Enter the user name to present to the network
- Password - Enter the password of the network
- PEAP Version - Select the PEAP version used at the access point.
- Label - Select the label used by the access point.
- EAPOL version - Select version (1 or 2) depending on the version used at the access point
- CA Certificates - Upload a CA certificate to present to the access point for authentication

## 4.2 Easy Wi-Fi Connection with WPS function

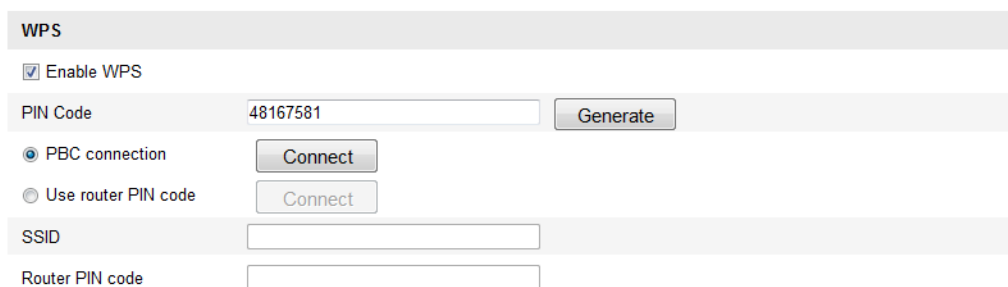
### **Purpose:**

The setting of the wireless network connection is never easy. To avoid the complex setting of the wireless connection you can enable the WPS function.

WPS (Wi-Fi Protected Setup) refers to the easy configuration of the encrypted connection between the device and the wireless router. The WPS makes it easy to add new devices to an existing network without entering long passphrases. There are two modes of the WPS connection, the PBC mode and the PIN mode.

**Note:** If you enable the WPS function, you don't need to configure the parameters such as the encryption type and you don't need to know the key of the wireless connection.


### **Steps:**



The screenshot shows a web interface for WPS configuration. At the top, there's a tab labeled 'WPS'. Below it, a checkbox 'Enable WPS' is checked. Underneath, there's a 'PIN Code' field containing '48167581' and a 'Generate' button. Below that, there are two radio button options: 'PBC connection' (which is selected) and 'Use router PIN code'. Each has a corresponding 'Connect' button. At the bottom, there are two empty text input fields labeled 'SSID' and 'Router PIN code'.

**Figure 4-7** Wi-Fi Settings - WPS

### **PBC Mode:**

PBC refers to the Push-Button-Configuration, in which the user simply has to push a button, either an actual or virtual one (as the  button on the configuration interface of the IE browser), on both the Access Point (and a registrar of the network) and the new wireless client device.

1. Check the checkbox of ☒ Enable WPS to enable WPS.
2. Choose the connection mode as PBC.



**Note:** Support of this mode is mandatory for both the Access Points and the connecting devices.

3. Check on the Wi-Fi router to see if there is a WPS button. If yes push the button and you can see the indicator near the button start flashing, which means the WPS function of the router is enabled. For detailed operation, please see the user guide of the router.
4. Push the WPS button to enable the function on the camera.

If there is not a WPS button on the camera, you can also click the virtual button to enable the PBC function on the web interface.

Click  button.



When the PBC mode is both enabled in the router and the camera, the camera and the wireless network is connected automatically.

#### **PIN Mode:**

The PIN mode requires a Personal Identification Number (PIN) to be read from either a sticker or the display on the new wireless device. This PIN must then be entered to connect the network, usually the Access Point of the network.

#### **Steps:**

1. Choose a wireless connection on the list and the SSID is shown.

The screenshot displays the Wi-Fi configuration page. At the top is a 'Wireless List' table with columns: No., SSID, Working Mode, Security Mode, Channel, Signal Strength, and Speed(Mbps). Below this are sections for 'Wi-Fi' settings (SSID, Network Mode, Security Mode, Encryption Type, Key 1) and 'WPS' settings (Enable WPS, PIN Code, PBC connection, Use router PIN code, SSID, Router PIN code).

No.	SSID	Working Mode	Security Mode	Channel	Signal Strength	Speed(Mbps)
10	AP	infrastructure	WPA2-personal	11	13	54
11	Webber	infrastructure	WPA2-personal	11	7	54
12	TP-LINK_PocketAP_DFB048	infrastructure	WPA2-personal	6	7	150
13	AP1	infrastructure	WPA2-personal	11	0	150
14	TP-LINK_PocketAP_C4C218	infrastructure	NONE	6	0	150

**Wi-Fi**

SSID:

Network Mode: ☒ Manager ☐ Ad-Hoc

Security Mode:

Encryption Type:

Key 1:

**WPS**

☒ Enable WPS

PIN Code:

☐ PBC connection

☒ Use router PIN code

SSID:

Router PIN code:

Figure 4-8 Wi-Fi Settings – WPS PIN Mode

- Choose the ☒ Use router PIN code .

If the PIN code is generated from the router side, you should enter the PIN code you get from the router side in the  field.

- Click  button.

Or

You can generate the PIN code on the camera side. And the expired time for the PIN code is 120 seconds.

- Click

The screenshot shows the 'PIN Code' field containing the value '48167581' and a 'Generate' button next to it.

- Enter the code to the router, in the example, enter 48167581 to the router.

## 4.3 IP Property Settings for Wireless Network

### Connection

The default IP address of wireless network interface controller is 192.168.1.64. When you connect the wireless network you can change the default IP.

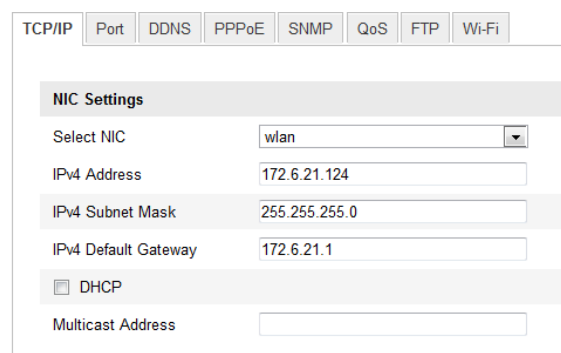
**Steps:**

1. Enter the TCP/IP configuration interface.

Configuration> Advanced Configuration> Network> TCP/IP

or

Configuration> Basic Configuration> Network> TCP/IP



The screenshot shows the 'TCP/IP' configuration page. At the top, there are tabs for 'TCP/IP', 'Port', 'DDNS', 'PPPoE', 'SNMP', 'QoS', 'FTP', and 'Wi-Fi'. The 'TCP/IP' tab is selected. Below the tabs, there is a section titled 'NIC Settings'. It contains a 'Select NIC' dropdown menu with 'wlan' selected. Below this are three input fields: 'IPv4 Address' with the value '172.6.21.124', 'IPv4 Subnet Mask' with the value '255.255.255.0', and 'IPv4 Default Gateway' with the value '172.6.21.1'. Below these fields is a checkbox labeled 'DHCP' which is currently unchecked. At the bottom, there is a 'Multicast Address' input field.

**Figure 4-9** TCP/IP Settings

2. Select the NIC as wlan.
3. Customize the IPv4 address, the IPv4 Subnet Mask and the Default Gateway.

The setting procedure is the same with that of LAN.

If you want to be assigned the IP address you can check the checkbox to enable the DHCP.

# Chapter 5 Live View

## 5.1 Live View Page

### **Purpose:**

The live video page allows you to view live video, capture images, realize PTZ control, set/call presets and configure video parameters.

Log in the network camera to enter the live view page, or you can click

Live View

on the menu bar of the main page to enter the live view page.

### **Descriptions of the live view page:**

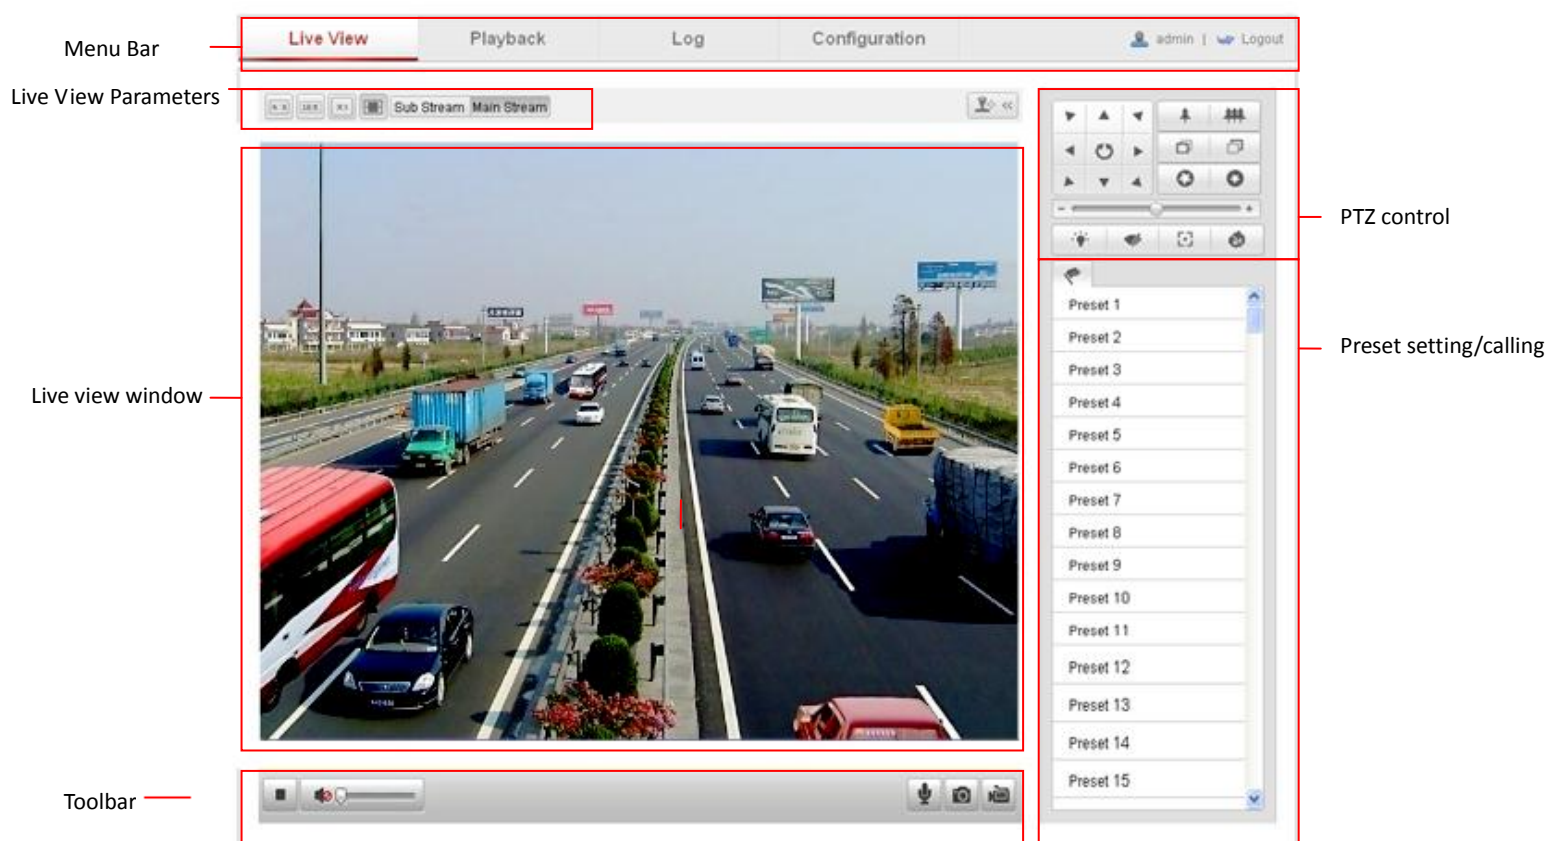


Figure 5-1 Live View Page

### **Menu Bar:**

Click each tab to enter Live View, Playback, Log and Configuration page respectively.

### **Live View Window:**

Display the live video.

### **Toolbar:**

Operations on the live view page, e.g., live view, capture, record, audio on/off, two-way audio, etc.

**PTZ Control:**

Panning, tilting and zooming actions of the camera and the lighter and wiper control (if it supports PTZ function or an external pan/tilt unit has been installed).

**Preset Setting/Calling:**

Set and call the preset for the camera (if supports PTZ function or an external pan/tilt unit has been installed).

**Live View Parameters:**

Configure the image size and stream type of the live video.

## 5.2 Starting Live View








In the live view window as shown in Figure 5-2, click  on the toolbar to start the live view of the camera.



Figure 5-2 Start Live View

Table 5-1 Descriptions of the Toolbar

Icon	Description
 / 	Start/Stop live view

	Manually capture the pictures displayed in live view and then save it as a JPEG file.
	Manually start/stop recording.
	Audio on and adjust volume /Mute
	Turn on/off microphone

**Note:** Before using the two-way audio function or recording with audio, please set the **Stream Type** to **Video & Audio** referring to *Section 5.4*.



### Full-screen Mode

You can double-click on the live video to switch the current live view into full-screen or return to normal mode from the full-screen.

Please refer to the following sections for more information:

- Configuring remote recording in *Section 6.2 Configuring Recording Schedule*.
- Setting the image quality of the live video in *Section 5.1 Configuring Local Parameters* and *Section 5.4.1 Configuring Video Settings*.
- Setting the OSD text on live video in *Section 5.5.2 Configuring OSD Settings*.

## 5.3 Recording and Capturing Pictures Manually

In the live view interface, click  on the toolbar to capture the live pictures or click  to record the live video. The local saving paths of the captured pictures and clips can be set on the **Configuration > Local Configuration** page. To configure remote scheduled recording, please refer to *Section 6.2*.

**Note:** The captured image will be saved as a JPEG file in your computer.

## 5.4 Operating PTZ Control

### Purpose:



In the live view interface, you can use the PTZ control buttons to realize pan/tilt/zoom control of the camera.

### Before you start:

To realize PTZ control, the camera connected to the network must support the PTZ function or a pan/tilt unit has been installed to the camera. Please properly set the PTZ parameters on RS-485 Settings page referring to *Section 10.6 RS-485 Settings*.



### 5.4.1 PTZ Control Panel

On the live view page, click  to show the PTZ control panel or click  to hide it.

Click the direction buttons to control the pan/tilt movements.



Figure 5-3 PTZ Control Panel

Click the zoom/iris/focus buttons to realize lens control.

**Notes:**

















- There are 8 direction arrows (, , , , , , , ) in the live view window when you click and drag the mouse in the relative positions.
- For the cameras which support lens movements only, the direction buttons are invalid.


Table 5-2 Descriptions of PTZ Control Panel

Button	Description
	Zoom in/out
	Focus near/far
	Iris open/close
	Light on/off
	Wiper on/off
	One-touch focus
	Initialize lens
	Adjust speed of pan/tilt movements



### 5.4.2 Setting / Calling a Preset

● **Setting a Preset:**

1. In the PTZ control panel, select a preset number from the preset list.



**Figure 5-4** Setting a Preset


2. Use the PTZ control buttons to move the lens to the desired position.
  - Pan the camera to the right or left.
  - Tilt the camera up or down.
  - Zoom in or out.
  - Refocus the lens.
3. Click  to finish the setting of the current preset.
4. You can click  to delete the preset.

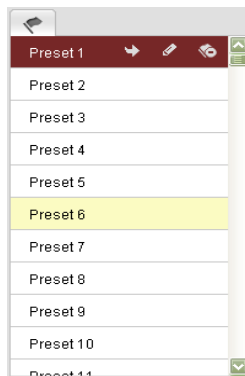
**Note:** You can configure up to 128 presets.

#### ● Calling a Preset:

This feature enables the camera to point to a specified preset scene manually or when an event takes place.

For the defined preset, you can call it at any time to the desired preset scene.

In the PTZ control panel, select a defined preset from the list and click  to call the preset.









**Figure 5-5** Calling a Preset

## 5.5 Configuring Live View Parameters

### **Purpose:**

You can select the stream type and adjust the image size on the live view page.

- Click  or  tab under the menu bar of the live view interface to select the stream type as main stream or sub-stream for live viewing.

- Click each tab     to set the image size to 4:3, 16:9, original or auto.

**Note:** Please refer to *Section 5.4.1 Configuring Video Settings* for more detailed settings about video parameters.

# Chapter 6 Network Camera Configuration

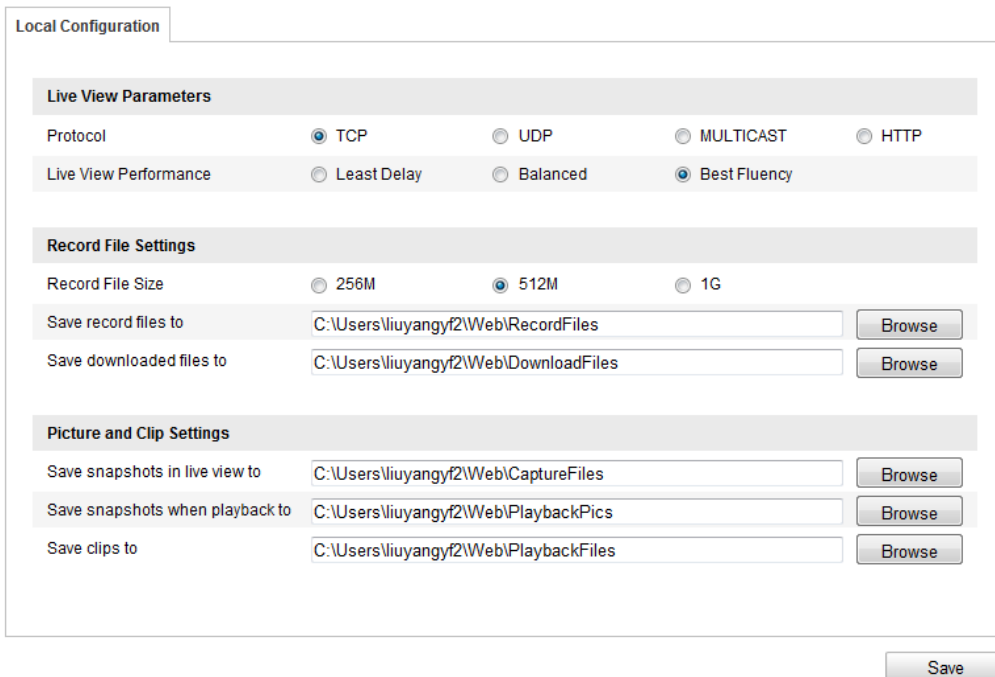
## 6.1 Configuring Local Parameters

**Note:** The local configuration refers to the parameters of the live view and other operations using the web browser.

**Steps:**

1. Enter the Local Configuration interface:

**Configuration > Local Configuration**



The screenshot shows the 'Local Configuration' web interface. It has a title bar 'Local Configuration' and a 'Save' button at the bottom right. The interface is divided into three main sections:

- Live View Parameters:** Contains radio buttons for 'Protocol' (TCP is selected), 'UDP', 'MULTICAST', and 'HTTP'. Below it, 'Live View Performance' has radio buttons for 'Least Delay', 'Balanced', and 'Best Fluency' (which is selected).
- Record File Settings:** Contains radio buttons for 'Record File Size' (256M, 512M is selected, 1G). Below are two text input fields: 'Save record files to' (C:\Users\liuyangf2\Web\RecordFiles) and 'Save downloaded files to' (C:\Users\liuyangf2\Web\DownloadFiles), each with a 'Browse' button.
- Picture and Clip Settings:** Contains three text input fields: 'Save snapshots in live view to' (C:\Users\liuyangf2\Web\CaptureFiles), 'Save snapshots when playback to' (C:\Users\liuyangf2\Web\PlaybackPics), and 'Save clips to' (C:\Users\liuyangf2\Web\PlaybackFiles), each with a 'Browse' button.

**Figure 6-1** Local Configuration Interface

2. Configure the following settings:
  - **Live View Parameters:** Set the protocol type, stream type, image size and live view performance.
    - ◆ **Protocol Type:** TCP, UDP, MULTICAST and HTTP are selectable.  
**TCP:** Ensures complete delivery of streaming data and better video quality,


yet the real-time transmission will be affected.

**UDP:** Provides real-time audio and video streams.

**HTTP:** Allows the same quality as of TCP without setting specific ports for streaming under some network environments.

**MULTICAST:** It's recommended to select MCAST type when using the Multicast function. For detailed information about Multicast, refer to *Section 6.3.1 TCP/IP Settings*.

- ◆ **Live View Performance:** Set the live view performance to Least Delay, Balanced or Best Fluency.
- **Record File Settings:** Set the saving path of the recorded video files.
  - ◆ **Record File Size:** Select the packed size of the manually recorded and downloaded video files to 256M, 512M or 1G.
  - ◆ **Save record files to:** Set the saving path for the manually recorded video files.
  - ◆ **Save downloaded files to:** Set the saving path for the downloaded video files in playback mode.
- **Picture and Clip Settings:** Set the saving paths of the captured pictures and clipped video files.
  - ◆ **Save snapshots in live view to:** Set the saving path of the manually captured pictures in live view mode.
  - ◆ **Save snapshots when playback to:** Set the saving path of the captured pictures in playback mode.
  - ◆ **Save clips to:** Set the saving path of the clipped video files in playback mode.

**Note:** You can click  to change the directory for saving the clips and pictures.

3. Click  to save the settings.

## 6.2 Configuring Time Settings

### **Purpose:**

You can follow the instructions in this section to configure the time synchronization and DST settings.

### **Steps:**

1. Enter the Time Settings interface:  
**Configuration > Basic Configuration > System > Time Settings**  
Or **Configuration > Advanced Configuration > System > Time Settings**  
And we have three ways to configure the **Time Settings**.

Figure 6-2 Time Settings

- Select the Time Zone.

Select the Time Zone which is the closest to the camera's location from the drop-down menu.


Figure 6-3 Time Zone Settings

- Configure the time synchronization by NTP Server or manually.
- ◆ Configuring Time Synchronization by NTP Server.
  - (1) Check the checkbox to enable the **NTP** function.
  - (2) Configure the following settings:
    - Server Address:** IP address of NTP server.
    - NTP Port:** Port of NTP server.
    - Interval:** The time interval between the two synchronizing actions with NTP server.

Figure 6-4 Time Sync by NTP Server

**Note:** If the camera is connected to a public network, you should use a NTP server that has a time synchronization function, such as the server at the National Time Center (IP Address: 210.72.145.44). If the camera is set in a customized network, NTP software can be used to establish a NTP server for time synchronization.

#### ◆ Configuring Time Synchronization Manually

Enable the **Manual Time Sync** function and then click  to set the system time from the pop-up calendar.

**Note:** You can also check the **Sync with local time** checkbox to synchronize the time of the camera with the time of your computer.

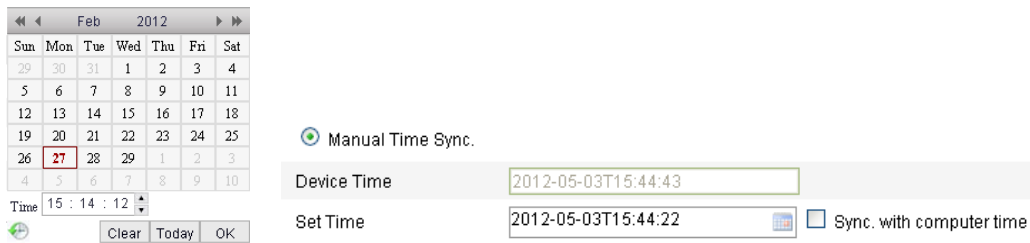


Figure 6-5 Time Sync Manually

- Check ☐ **Enable DST** to enable the DST function and Set the date of the DST period.

DST					
<input checked="" type="checkbox"/>	Enable DST				
Start Time	Apr	First	Sun	02	o'clock
End Time	Oct	Last	Sun	02	o'clock
DST Bias	30min				

Figure 6-6 DST Settings

2. Click  to save the settings.

## 6.3 Configuring Network Settings

### 6.3.1 Configuring TCP/IP Settings

#### **Purpose:**

TCP/IP settings must be properly configured before you operate the camera over network.

#### **Steps:**

1. Enter TCP/IP Settings interface:

**Configuration > Basic Configuration > Network > TCP/IP**

**Or Configuration > Advanced Configuration > Network > TCP/IP**

Figure 6-7 TCP/IP Settings

2. Configure the NIC settings, including the NIC Type, IPv4 Address, IPv4 Subnet Mask, IPv4 Default Gateway, MTU settings and Multicast Address.

**Notes:**

- The valid value range of MTU is 500 ~ 1500.
  - The Multicast sends a stream to the multicast group address and allows multiple clients to acquire the stream at the same time by requesting a copy from the multicast group address. Before utilizing this function, you have to enable the Multicast function of your router.
3. If the DHCP server is available, you can check ☐ DHCP to automatically obtain an IP address and other network settings from that server.
  4. If the DNS server settings are required for some applications (e.g., sending email), you should properly configure the Preferred DNS Server.

Figure 6-8 DNS Server Settings

5. Click  to save the above settings.

**Note:** it will ask for a reboot for the settings to take effect.

## 6.3.2 Configuring Port Settings

**Purpose:**

You can set the port No. of the camera, e.g. HTTP port, RTSP port and HTTPS port.

**Steps:**

1. Enter the Port Settings interface:  
**Configuration > Basic Configuration > Network > Port**  
**Or Configuration > Advanced Configuration > Network > Port**

The interface shows the 'Port' configuration tab. It contains three rows of settings:

Port Type	Port Number
HTTP Port	80
RTSP Port	554
HTTPS Port	443

A 'Save' button is located at the bottom right of the form.

Figure 6-9 Port Settings

- Set the HTTP port, RTSP port and HTTPS port of the camera.

**HTTP Port:** The default port number is 80.

**RTSP Port:** The default port number is 554.

**HTTPS Port:** The default port number is 443.

- Click  to save the settings.

**Note:** it will ask for a reboot for the settings to take effect.

### 6.3.3 Configuring PPPoE Settings

#### Steps:

- Enter the PPPoE Settings interface:

**Configuration > Advanced Configuration > Network > PPPoE**


The interface shows the 'PPPoE' configuration tab. It contains the following settings:

- ☐ Enable PPPoE
- Dynamic IP: 0.0.0.0
- User Name: [Empty field]
- Password: [Empty field]
- Confirm: [Empty field]

Figure 6-10 PPPoE Settings

- Check the **Enable PPPoE** checkbox to enable this feature.
- Enter **User Name**, **Password**, and **Confirm** password for PPPoE access.

**Note:** The User Name and Password should be assigned by your ISP.

- Click  to save and exit the interface.

**Note:** it will ask for a reboot for the settings to take effect.

### 6.3.4 Configuring DDNS Settings

#### Purpose:

If your camera is set to use PPPoE as its default network connection, you can use the Dynamic DNS (DDNS) for network access.



**Before you start:**

Registration on the DDNS server is required before configuring the DDNS settings of the camera.


**Steps:**

1. Enter the DDNS Settings interface:

**Configuration > Advanced Configuration > Network > DDNS**

The screenshot shows the DDNS Settings interface. At the top, there are tabs for TCP/IP, Port, DDNS, PPPoE, SNMP, 802.1X, QoS, and FTP. The DDNS tab is selected. Below the tabs, there is a checkbox labeled 'Enable DDNS' which is checked. Below this, there are several input fields: 'DDNS Type' (a dropdown menu showing 'DynDNS'), 'Server Address' (an empty text box), 'Domain' (an empty text box), 'Port' (a text box containing '0'), 'User Name' (an empty text box), 'Password' (an empty text box), and 'Confirm' (an empty text box). At the bottom right of the form, there is a 'Save' button.

**Figure 6-11 DDNS Settings**

2. Check the **Enable DDNS** checkbox to enable this feature.
3. Select **DDNS Type**. Three DDNS types are selectable: HiDDNS, IPServer and DynDNS.
  - DynDNS:
    - (1) Enter **Server Address** of DynDNS (e.g. members.dyndns.org).
    - (2) In the **Domain** text field, enter the domain name obtained from the DynDNS website.
    - (3) Enter the **Port** of DynDNS server.
    - (4) Enter the **User Name** and **Password** registered on the DynDNS website.
    - (5) Click  to save the settings.

This screenshot shows the DDNS Settings interface with the form filled out. The 'Enable DDNS' checkbox is checked. The 'DDNS Type' dropdown is set to 'DynDNS'. The 'Server Address' field contains 'members.dyndns.org', the 'Domain' field contains '123.dyndns.com', the 'Port' field contains '80', the 'User Name' field contains '123', and both the 'Password' and 'Confirm' fields are filled with masked characters (dots). The 'Save' button is visible at the bottom right.

**Figure 6-12 DynDNS Settings**

- IP Server:

**Steps:**

(1) Enter the Server Address of the IP Server.

(2) Click  to save the settings.

**Note:** For the IP Server, You have to apply a static IP, subnet mask, gateway and preferred DNS from the ISP. The **Server Address** should be entered with the static IP address of the computer that runs the IP Server software.

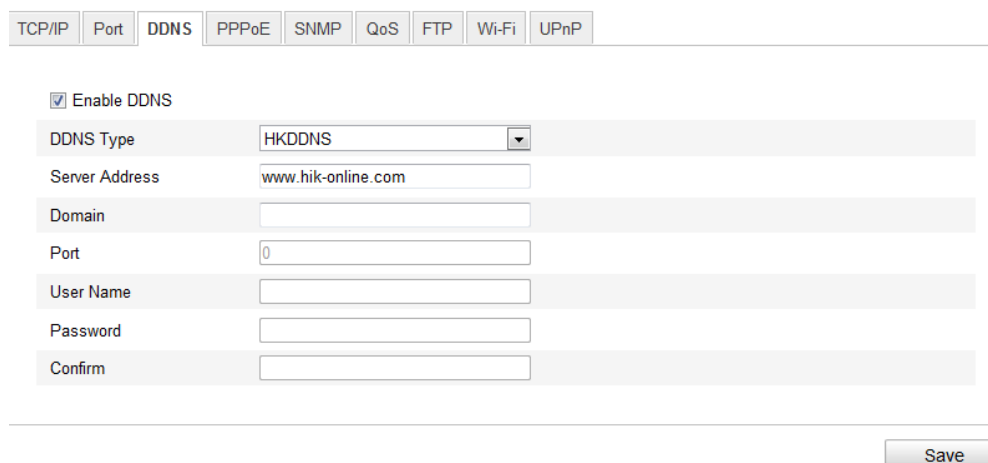


**Figure 6-13** IPServer Settings

- HKDDNS


**Steps:**

(1) Choose the DDNS Type as HKDDNS.



(2) Enter the Server Address [www.hik-online.com](http://www.hik-online.com)

(3) Enter the Domain name of the camera. The domain is the same with the device alias in the HKDDNS server.

(4) Click  to save the new settings.

**Note:** It will ask for a reboot for the settings to take effect.

## 6.3.5 Configuring SNMP Settings

**Purpose:**

You can use SNMP to get camera status, parameters and alarm related information.

**Before you start:**

Before setting the SNMP, please download the SNMP software and manage to receive the camera information via SNMP port. By setting the Trap Address, the camera can send the alarm event and exception messages to the surveillance center.

**Note:** The SNMP version you select should be the same as that of the SNMP software.

**Steps:**

1. Enter the SNMP Settings interface:

**Configuration > Advanced Configuration > Network > SNMP**

The screenshot shows the 'SNMP' configuration page with tabs for TCP/IP, Port, DDNS, PPPoE, SNMP, 802.1X, QoS, and FTP. The 'SNMP' tab is active, displaying three sections:

- SNMP v1v2:** Includes checkboxes for 'Enable SNMP SNMPv1' (checked) and 'Enable SNMP v2c' (checked). Below are text fields for 'Write SNMP Community' (private), 'Read SNMP Community' (public), 'Trap Address', 'Trap Port' (162), and 'Trap Community' (public).
- SNMP v3:** Includes a checkbox for 'Enable SNMPv3' (unchecked). It has two identical sets of fields for Read and Write operations, each with 'UserName', 'Security Level' (auth, priv), 'Authentication Algorithm' (MD5, SHA), 'Authentication Password', 'Private-key Algorithm' (DES, AES), and 'Private-key password'.
- SNMP Other Settings:** Includes a text field for 'SNMP Port' (161).

A 'Save' button is located at the bottom right of the form.

**Figure 6-14** SNMP Settings

2. Check the corresponding version checkbox ( Enable SNMP SNMPv1 ,

Enable SNMP v2c , Enable SNMPv3) to enable the feature.

3. Configure the SNMP settings.

**Note:** The settings of the SNMP software should be the same as the settings you configure here.

4. Click  to save and finish the settings.

**Note:** it will ask for a reboot for the settings to take effect.

### 6.3.6 Configuring 802.1X Settings

**Purpose:**

The IEEE 802.1X standard is supported by the network cameras, and when the feature is enabled, the camera data is secured and user authentication is needed when connecting the camera to the network.

**Before you start:**

The switch or router to which the camera is connected must also support the IEEE 802.1X standard and a server must be configured. Please apply and register a user name and password for 802.1X in the server.

**Steps:**


1. Enter the 802.1X Settings interface:

**Configuration > Advanced Configuration > Network > 802.1X**

**Figure 6-15 802.1X Settings**

2. Check the **Enable IEEE 802.1X** checkbox to enable the feature.
3. Configure the 802.1X settings, including EAPOL version, user name and password.

**Note:** The EAPOL version must be identical with that of the router or the switch.

4. Enter the user name and password to access the server.
5. Click  to finish the settings.

**Note:** it will ask for a reboot for the settings to take effect.

### 6.3.7 Configuring QoS Settings

**Purpose:**

QoS (Quality of Service) can help solve the network delay and network congestion by configuring the priority of data sending.

**Steps:**

1. Enter the QoS Settings interface:

**Configuration > Advanced Configuration > Network > QoS**

Figure 6-16 QoS Settings

2. Configure the QoS settings, including video / audio DSCP, event / alarm DSCP and Management DSCP.

The valid value range of the DSCP is 0-63. The bigger the DSCP value is the higher the priority is.

3. Click  to save the settings.

**Note:** it will ask for a reboot for the settings to take effect.

### 6.3.8 Configuring FTP Settings

**Purpose:**

The captured pictures of the camera can be uploaded to FTP server.

**Steps:**

1. Enter the FTP Settings interface:

**Configuration > Advanced Configuration > Network > FTP**


Figure 6-17 FTP Settings

2. Configure the FTP settings, including server address, port, user name, password, directory and upload type.

**Directory:** In the **Directory Structure** field, you can select the root directory, parent directory and child directory. When the parent directory is selected, you have the option to use the Device Name, Device Number or Device IP for the name of the directory; and when the Child Directory is selected, you can use the

Camera Name or Camera No. as the name of the directory.

**Upload type:** To enable uploading the captured picture to the FTP server.

- Click  to save the settings.

**Notes:** If you want to upload the captured pictures to FTP server, you have to enable the continuous snapshot or event-triggered snapshot on **Snapshot** page. For detailed information, please refer to the *Section 6.6.8*. It will ask for a reboot for the settings to take effect.

### 6.3.9 Configuring UPnP Settings

Universal Plug and Play (UPnP) is a networking architecture that provides compatibility among networking equipment, software and other hardware devices. The UPnP protocol allows devices to connect seamlessly and to simplify the implementation of networks in the home and corporate environments.


With the function enabled, you don't need to configure the port mapping for each port, and the camera is connected to the Wide Area Network via the router.

**Steps:**

- Enter the UPnP settings interface.

**Configuration > Advanced Configuration > Network > UPnP**

- Click on the arrow button and choose to enable or disable the UPnP function.

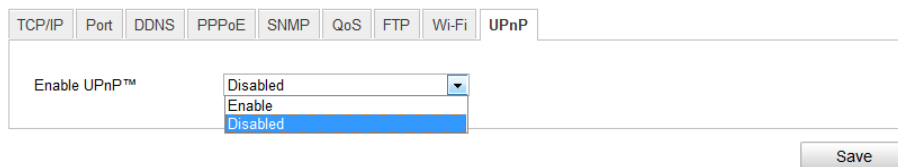

**Figure 6-18** Configure UPnP Settings

- Click  to save the settings.

## 6.4 Configuring Video and Audio Settings

### 6.4.1 Configuring Video Settings

**Steps:**

- Enter the Video Settings interface:

**Configuration > Basic Configuration > Video / Audio > Video**

Or **Configuration > Advanced Configuration > Video / Audio > Video**

The screenshot shows a web-based configuration interface for a network camera. At the top, there are two tabs: 'Video' and 'Audio'. The 'Video' tab is active. Below the tabs, there is a form with several settings, each with a label and a dropdown menu or input field. The settings are: Stream Type (Main Stream(Normal)), Video Type (Video&Audio), Resolution (1920\*1080P), Bitrate Type (Variable), Video Quality (Medium), Frame Rate (25), Max. Bitrate (2048 Kbps), Video Encoding (H.264), and I Frame Interval (25). A 'Save' button is located at the bottom right of the form.

**Figure 6-19** Configure Video Settings

2. Select the **Stream Type** of the camera to main stream (normal) or sub-stream.  
The main stream is usually for recording and live viewing with good bandwidth, and the sub-stream can be used for live viewing when the bandwidth is limited. Refer to the *Section 6.1 Configuring Local Parameters* for switching the main stream and sub-stream for live viewing.

3. You can customize the following parameters for the selected main stream or sub-stream:

**Video Type:**

Select the stream type to video stream, or video & audio composite stream. The audio signal will be recorded only when the **Video Type** is **Video & Audio**.

**Resolution:**

Select the resolution of the video output.

**Bitrate Type:**

Select the bitrate type to constant or variable.

**Video Quality:**

When bitrate type is selected as **Variable**, 6 levels of video quality are selectable.

**Frame Rate:**

Set the frame rate to 1/16~25 fps. The frame rate is to describe the frequency at which the video stream is updated and it is measured by frames per second (fps). A higher frame rate is advantageous when there is movement in the video stream, as it maintains image quality throughout.

**Max. Bitrate:**

Set the max. bitrate to 32~16384 Kbps. The higher value corresponds to the higher video quality, but the higher bandwidth is required.

**Video Encoding:**

When the **Stream Type** of the camera is main stream, the **Video Encoding** standard can be set to H.264.

When the **Stream Type** of the camera is sub-stream, the **Video Encoding** standard can be set to H.264, MJPEG.

**I Frame Interval:**

Set the I-Frame interval to 1~400.

4. Click  to save the settings.

## 6.4.2 Configuring Audio Settings

**Steps:**


1. Enter the Audio Settings interface

**Configuration > Basic Configuration > Video / Audio > Audio**

**Or Configuration > Advanced Configuration > Video / Audio > Audio**



**Figure 6-20** Audio Settings

2. Configure the following settings.  
**Audio Encoding:** G.711 ulaw, G.711alaw and G.726 are selectable.
3. Click  to save the settings.

## 6.5 Configuring Image Parameters

### 6.5.3 Configuring Display Settings

**Purpose:**

You can set the image quality of the camera, including brightness, contrast, saturation, hue, sharpness, etc.

**Note:** The Display parameters vary depending on the camera model.

**Steps:**

1. Enter the Display Settings interface:

**Configuration > Basic Configuration> Image> Display Settings**

**Or Configuration > Advanced Configuration> Image> Display Settings**

2. Set the image parameters of the camera.





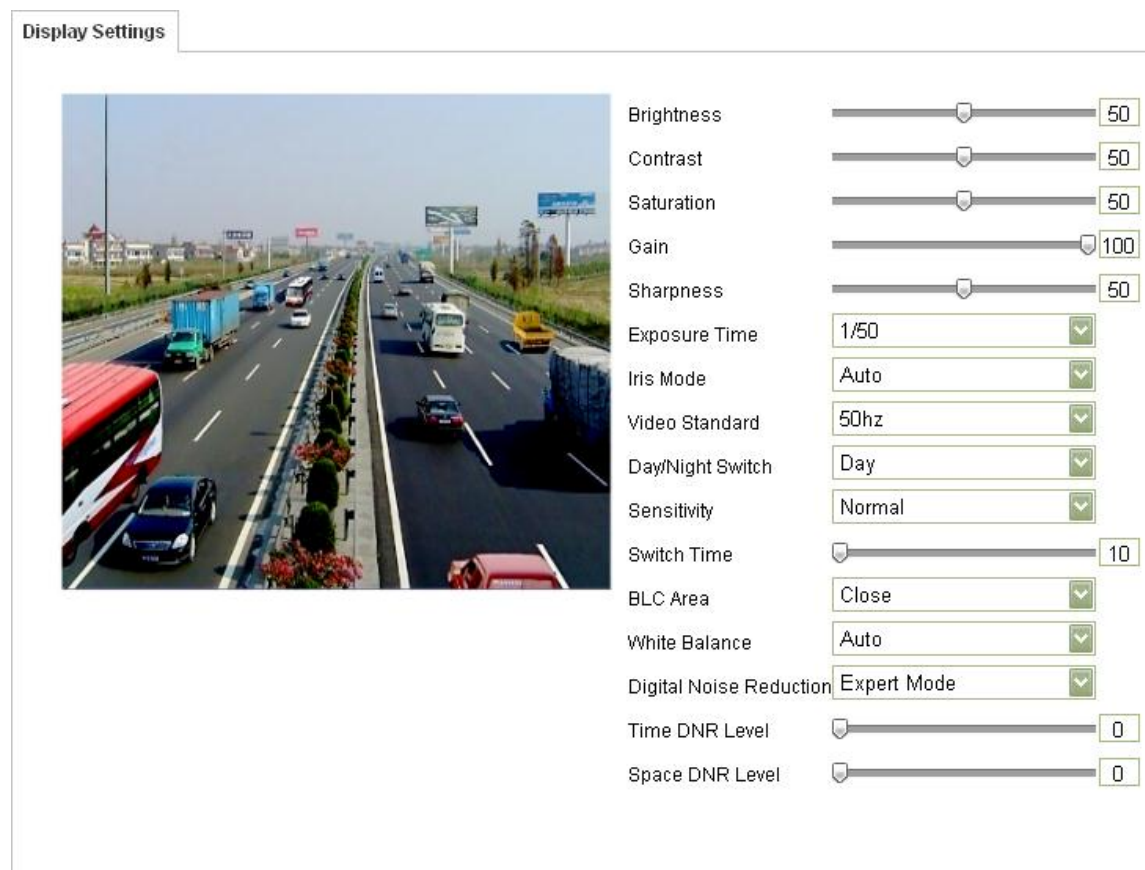


Figure 6-21 Display Settings

**Descriptions of parameter configuration:****Exposure Time:**

Speeds from 1/25 to 1/100,000 are selectable.

**Iris Mode:**

Auto and Manual are selectable.

**Video Standard:**

50 Hz and 60 Hz are selectable.

**Day/Night Switch:**

Day, Night and Auto are selectable.

**Sensitivity**

The Sensitivity of Day/Night switch can be set Low, Normal or High.

**Switch Time:**

Day/Night switch time is to adjust the time of day/night switch.

**BLC Area:**

BLC area is the area sense the light intensity, Close, Up, Down, Left, Right and Center are selectable.

**White Balance:**

Auto white balance 1. /AWB1, Auto white balance 2. /AWB2 and Auto are selectable.

**Digital Noise Reduction:**

Close, Normal Mode and Expert Mode are selectable.

## 6.5.4 Configuring OSD Settings

### **Purpose:**

You can customize the camera name and time on the screen.

### **Steps:**

1. Enter the OSD Settings interface:

**Configuration > Advanced Configuration > Image > OSD Settings**




**Figure 6-22** OSD Settings

2. Check the corresponding checkbox to select the display of camera name, date or week if required.
3. Edit the camera name in the text field of **Camera Name**.
4. Select from the drop-down list to set the time format, date format and display mode.
5. You can use the mouse to click and drag the text frame **IPCamera 01** in the live view window to adjust the OSD position.



Figure 6-23 Adjust OSD Location



6. Click  to activate above settings.

### 6.5.5 Configuring Text Overlay Settings

**Purpose:**

You can customize the text overlay.

**Steps:**

1. Enter the Text Overlay Settings interface:  
**Configuration > Advanced Configuration > Image > Text Overlay**
2. Check the checkbox in front of textbox to enable the on-screen display.
3. Input the characters in the textbox.
4. Use the mouse to click and drag the red text frame  in the live view window to adjust the text overlay position.
5. Click .

**Note:** There are up to 4 text overlays configurable.



Figure 6-24 Text Overlay Settings

### 6.5.6 Configuring Privacy Mask

**Purpose:**

Privacy mask enables you to cover certain areas on the live video to prevent certain spots in the surveillance area from being live viewed and recorded.

**Steps:**

1. Enter the Privacy Mask Settings interface:

**Configuration > Advanced Configuration > Image > Privacy Mask**

2. Check the checkbox of **Enable Privacy Mask** to enable this function.

3. Click .

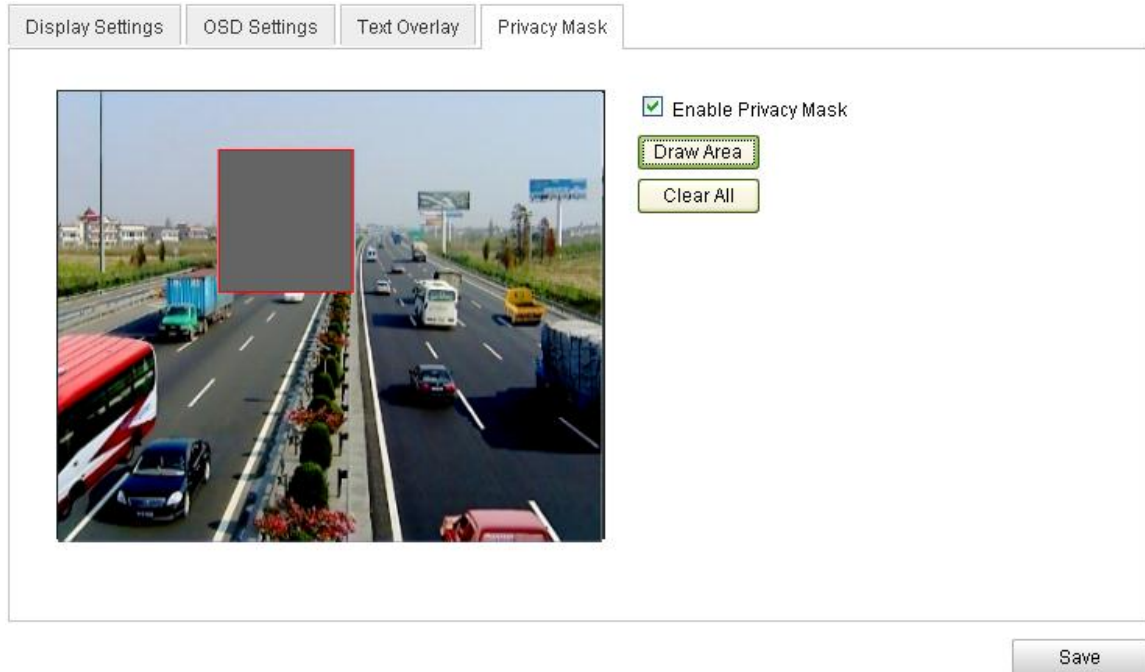


Figure 6-25 Privacy Mask Settings

- Click and drag the mouse in the live video window to draw the mask area.

**Note:** You are allowed to draw up to 4 areas on the same image.

- Click **Stop Drawing** to finish drawing or click **Clear All** to clear all of the areas you set without saving them.
- Click **Save** to save the settings.

## 6.6 Configuring and Handling Alarms

### **Purpose:**

This section explains how to configure the network camera to respond to alarm events, including motion detection, external alarm input, video loss, tamper-proof and exception. These events can trigger the alarm actions, such as Notify Surveillance Center, Send Email, Trigger Alarm Output, etc.

For example, when an external alarm is triggered, the network camera sends a notification to an e-mail address.

### 6.6.7 Configuring Motion Detection

#### **Purpose:**

Motion detection is a feature which can take alarm response actions and record the video for the motion occurred in the surveillance scene.

**Tasks:**

1. Set the Motion Detection Area.

**Steps:**

- (1) Enter the motion detection settings interface

**Configuration > Advanced Configuration > Events > Motion Detection**

- (2) Check the checkbox of Enable Motion Detection.



**Figure 6-26** Enable Motion Detection

- (3) Click **Draw Area**. Click and drag the mouse on the live video image to draw a motion detection area.

**Note:** You can draw up to 8 motion detection areas on the same image.

- (4) Click **Stop Drawing** to finish drawing.

**Note:** You can click **Clear All** to clear all of the areas.

- (5) Move the slider **Sensitivity** to set the sensitivity of the detection.

2. Set the Arming Schedule for Motion Detection.

**Steps:**

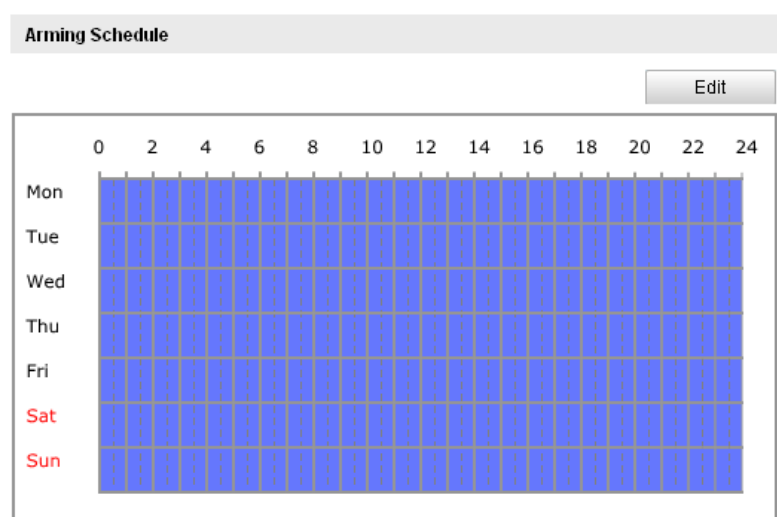





Figure 6-27 Arming Time

- (1) Click  to edit the arming schedule. The Figure 5-28 shows the editing interface of the arming schedule.
- (2) Choose the day you want to set the arming schedule.
- (3) Click  to set the time period for the arming schedule.
- (4) After you set the arming schedule, you can copy the schedule to other days (Optional).
- (5) Click  to save the settings.

**Note:** The time of each period can't be overlapped. Up to 4 periods can be configured for each day.

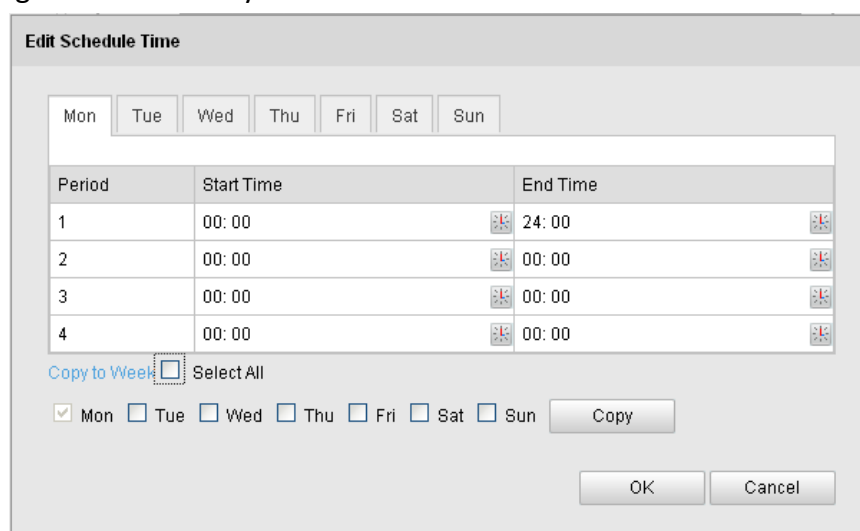


Figure 6-28 Arming Time Schedule

### 3. Set the Alarm Actions for Motion Detection.

**Purpose:**



You can specify the linkage method when an event occurs. The following contents are about how to configure the different types of linkage method.

Linkage Method	
Normal Linkage	Other Linkage
<input type="checkbox"/> Audible Warning <input type="checkbox"/> Notify Surveillance Center <input type="checkbox"/> Send Email <input checked="" type="checkbox"/> Upload to FTP <input type="checkbox"/> Trigger Channel	Trigger Alarm Output <input type="checkbox"/> Select All <input type="checkbox"/> A->1

Figure 6-29 Linkage Method

**Steps:**

- (1) Check the checkbox to select the linkage method. Audible warning, notify surveillance center, send email, upload to FTP, trigger channel and trigger alarm output are selectable (Optional).
  - **Audible Warning**  
Trigger the audible warning locally.
  - **Notify Surveillance Center**  
Send an exception or alarm signal to remote management software when an event occurs.
  - **Send Email**  
Send an email with alarm information to a user or users when an event occurs.  
**Note:** To send the Email when an event occurs, you need to refer to *Section 6.6.7* to set the related parameters.
  - **Upload to FTP**  
Capture the image when an alarm is triggered and upload the picture to a FTP server.  
**Note:** Set the FTP address and the remote FTP server first. Refer to *Section 6.3.8* for detailed information.
  - **Trigger Channel**  
The video will be recorded when the motion is detected. You have to set the recording schedule to realize this function. Please refer to *Section 7.2* for detailed information.
  - **Trigger Alarm Output**  
Trigger one or more external alarm outputs when an event occurs.  
**Note:** To trigger an alarm output when an event occurs, please refer to *Section 6.6.5* to set the related parameters.

## 6.6.8 Configuring Tamper-proof Alarm

**Purpose:**



You can configure the camera to trigger the alarm when the lens is covered and take alarm response action.

**Steps:**

1. Enter the Tamper-proof Settings interface:

**Configuration > Advanced Configuration > Events > Tamper-proof**

☒ Enable Tamper-proof



**Figure 6-30** Tamper-proof Alarm

2. Check **Enable Tamper-proof** checkbox to enable the tamper-proof detection.
3. Set the tamper-proof area; refer to *Step 1 Set the Motion Detection Area* in *Section 6.6.1*.
4. Click  to edit the arming schedule for tamper-proof. The arming schedule configuration is the same as the setting of the arming schedule for motion detection. Refer to *Step 2 Set the Arming Schedule for Motion Detection* in *Section 6.6.1*.
5. Check the checkbox to select the linkage method taken for the tamper-proof. Audible warning, notify surveillance center, send email and trigger alarm output are selectable. Please refer to *Step 3 Set the Alarm Actions for Motion Detection* in *Section 6.6.1*.
6. Click  to save the settings.

## 6.6.9 Configuring Video Loss Alarm

### Steps:

1. Enter the Video Loss Setting interface:

**Configuration > Advanced Configuration > Events > Video Loss**

☒ Enable Video Loss Detection

**Arming Schedule**

Edit

	0	2	4	6	8	10	12	14	16	18	20	22	24
Mon													
Tue													
Wed													
Thu													
Fri													
Sat													
Sun													

**Linkage Method**

Normal Linkage	Other Linkage
<input type="checkbox"/> Audible Warning <input checked="" type="checkbox"/> Notify Surveillance Center <input type="checkbox"/> Send Email	Trigger Alarm Output <input type="checkbox"/> Select All <input type="checkbox"/> A->1

Figure 6-31 Video Loss

2. Check the **Enable Video Loss Detection** checkbox to enable the video loss detection.
3. Click Edit to edit the arming schedule for video loss detection. The arming schedule configuration is the same as the setting of the arming schedule for motion detection. Refer to *Step 2 Set the Arming Schedule for Motion Detection* in *Section 6.6.1*.
4. Check the checkbox to select the linkage method taken for the video loss alarm. Audible warning, notify surveillance center, send email and trigger alarm output are selectable. Please *Step 3 Set the Alarm Actions for Motion Detection* in *Section 6.6.1*.
5. Click Save to save the settings.

## 6.6.10 Configuring External Alarm Input

### Steps:

1. Enter the Alarm Input Settings interface:

**Configuration > Advanced Configuration > Events > Alarm Input:**

2. Choose the alarm input No. and the Alarm Type. The alarm type can be NO (Normally Open) and NC (Normally Closed). Edit the name to set a name for the alarm input (optional).

Alarm Input No.	A<-1	
Alarm Name		(cannot copy)
Alarm Type	NO	
IP Address	Local	

Arming Schedule																																																																																																																	
	Edit																																																																																																																
	<table border="1"> <thead> <tr> <th></th> <th>0</th><th>2</th><th>4</th><th>6</th><th>8</th><th>10</th><th>12</th><th>14</th><th>16</th><th>18</th><th>20</th><th>22</th><th>24</th> </tr> </thead> <tbody> <tr><td>Mon</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>Tue</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>Wed</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>Thu</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>Fri</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>Sat</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>Sun</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </tbody> </table>		0	2	4	6	8	10	12	14	16	18	20	22	24	Mon														Tue														Wed														Thu														Fri														Sat														Sun													
	0	2	4	6	8	10	12	14	16	18	20	22	24																																																																																																				
Mon																																																																																																																	
Tue																																																																																																																	
Wed																																																																																																																	
Thu																																																																																																																	
Fri																																																																																																																	
Sat																																																																																																																	
Sun																																																																																																																	

Figure 6-32 Alarm Input Settings

3. Click  to set the arming schedule for the alarm input. Refer to *Step 2 Set the Arming Schedule for Motion Detection* in Section 6.6.1.
4. Check the checkbox to select the linkage method taken for the alarm input. Refer to *Step 3 Set the Alarm Actions for Motion Detection* in Section 6.6.1.
5. You can also choose the PTZ linking for the alarm input if your camera is installed with a pan/tilt unit. Check the relative checkbox and select the No. to enable Preset Calling, Patrol Calling or Pattern Calling.
6. You can copy your settings to other alarm inputs.
7. Click  to save the settings.

Linkage Method	
Normal Linkage	Other Linkage
<input type="checkbox"/> Audible Warning <input checked="" type="checkbox"/> Notify Surveillance Center <input type="checkbox"/> Send Email <input type="checkbox"/> Upload to FTP <input type="checkbox"/> Trigger Channel	Trigger Alarm Output <input type="checkbox"/> Select All <input type="checkbox"/> A->1 <input type="checkbox"/> A->2 <input type="checkbox"/> A->3

Copy to Alarm
<input type="checkbox"/> Select All <input checked="" type="checkbox"/> A<-1 <input type="checkbox"/> A<-2 <input type="checkbox"/> A<-3 <input type="checkbox"/> A<-4

Figure 6-33 Linkage Method

## 6.6.11 Configuring Alarm Output

### Steps:

1. Enter the Alarm Output Settings interface:

**Configuration>Advanced Configuration> Events > Alarm Output**

2. Select one alarm output channel in the **Alarm Output** drop-down list. You can also set a name for the alarm output (optional).
3. The **Delay** time can be set to **5sec, 10sec, 30sec, 1min, 2min, 5min, 10min** or **Manual**. The delay time refers to the time duration that the alarm output remains in effect after alarm occurs.
4. Click  to enter the **Edit Schedule Time** interface. The time schedule configuration is the same as the settings of the arming schedule for motion detection. Refer to *Step 2 Set the Arming Schedule for Motion Detection* in *Section 6.6.1*.
5. You can copy the settings to other alarm outputs.
6. Click  to save the settings.

Alarm Output	A->1	
Alarm Name		(cannot copy)
Delay	5s	
IP Address	Local	
Default Status	Low Level	
Triggering Status	Pulse	

Arming Schedule	
	<a href="#">Edit</a>
	0   2   4   6   8   10   12   14   16   18   20   22   24
Mon	
Tue	
Wed	
Thu	
Fri	
Sat	
Sun	

Copy to Alarm
<input type="checkbox"/> Select All <input checked="" type="checkbox"/> A->1

Figure 6-34 Alarm Output Settings

## 6.6.12 Handling Exception

The exception type can be HDD full, HDD error, network disconnected, IP address conflicted and illegal login to the cameras.

### Steps:


1. Enter the Exception Settings interface:

**Configuration > Advanced Configuration > Events > Exception**

2. Check the checkbox to set the actions taken for the Exception alarm. Refer to **Step 3 Set the Alarm Actions Taken for Motion Detection** in **Section 6.6.1**.

Exception Type	HDD Full			
<table border="1"> <thead> <tr> <th>Normal Linkage</th> <th>Other Linkage</th> </tr> </thead> <tbody> <tr> <td> <input type="checkbox"/> Audible Warning  <input type="checkbox"/> Notify Surveillance Center  <input type="checkbox"/> Send Email                 </td> <td>                     Trigger Alarm Output <input type="checkbox"/> Select All  <input type="checkbox"/> A-&gt;1                 </td> </tr> </tbody> </table>	Normal Linkage	Other Linkage	<input type="checkbox"/> Audible Warning <input type="checkbox"/> Notify Surveillance Center <input type="checkbox"/> Send Email	Trigger Alarm Output <input type="checkbox"/> Select All <input type="checkbox"/> A->1
Normal Linkage	Other Linkage			
<input type="checkbox"/> Audible Warning <input type="checkbox"/> Notify Surveillance Center <input type="checkbox"/> Send Email	Trigger Alarm Output <input type="checkbox"/> Select All <input type="checkbox"/> A->1			

Figure 6-35 Exception Settings

3. Click  to save the settings.

### 6.6.13 Configuring Email Settings

**Purpose:**

The system can be configured to send an Email notification to all designated receivers if an alarm event is detected, e.g., motion detection event, video loss, tamper-proof, etc.

**Before you start:**

Please configure the DNS Server settings under **Basic Configuration > Network > TCP/IP** or **Advanced Configuration > Network > TCP/IP** before using the Email function.

**Steps:**


1. Enter the TCP/IP Settings (**Configuration > Basic Configuration > Network > TCP/IP** or **Configuration > Advanced Configuration > Network > TCP/IP**) to set the IPv4 Address, IPv4 Subnet Mask, IPv4 Default Gateway and the Preferred DNS Server.

**Note:** Please refer to *Section 6.3.1 Configuring TCP/IP Settings* for detailed information.

2. Enter the Email Settings interface:

**Configuration > Advanced Configuration > Events > Email**

Sender	
Sender	<input type="text" value="lixin"/>
Sender's Address	<input type="text" value="lixinyf4@gmail.com"/>
SMTP Server	<input type="text" value="smtp.263xmail.com"/>
SMTP Port	<input type="text" value="25"/>
<input type="checkbox"/> Enable SSL	
Interval	<input type="text" value="2s"/> <input type="button" value="v"/> <input checked="" type="checkbox"/> Attached Image
<input type="checkbox"/> Authentication	
User Name	<input type="text"/>
Password	<input type="password"/>
Confirm	<input type="password"/>
Receiver	
Receiver1	<input type="text" value="lixin1"/>
Receiver1's Address	<input type="text" value="lixinyf4@gmail.com"/>
Receiver2	<input type="text"/>
Receiver2's Address	<input type="text"/>



**Figure 6-36** Email Settings

3. Configure the following settings:

**Sender:** The name of the email sender.

**Sender's Address:** The email address of the sender.

**SMTP Server:** The SMTP Server IP address or host name (e.g., smtp.263xmail.com).

**SMTP Port:** The SMTP port. The default TCP/IP port for SMTP is 25 (not secured). And the SSL SMTP port is 465.

**Enable SSL:** Check the checkbox to enable SSL if it is required by the SMTP server.

**Attached Image:** Check the checkbox of Attached Image if you want to send emails with attached alarm images.


**Interval:** The interval refers to the time between two actions of sending attached pictures.

**Authentication** (optional): If your email server requires authentication, check this checkbox to use authentication to log in to this server and enter the login user Name and password.

**Choose Receiver:** Select the receiver to which the email is sent. Up to 2 receivers can be configured.

**Receiver:** The name of the user to be notified.

**Receiver's Address:** The email address of user to be notified.

4. Click  to save the settings.

## 6.6.14 Configuring Snapshot Settings

### **Purpose:**

You can configure the scheduled snapshot and event-triggered snapshot. The captured picture can be stored in the SD card (if supported) or the netHDD (For detailed information about netHDD, please refer to *Section 7.1 Configuring NAS Settings*). You can also upload the captured pictures to a FTP server.

### **Basic Settings**

#### **Steps:**

1. Enter the Snapshot Settings interface:

**Configuration > Advanced Configuration > Events > Snapshot**

2. Check the **Enable Timing Snapshot** checkbox to enable continuous snapshot. Check the **Enable Event-triggered Snapshot** checkbox to check event-triggered snapshot.
3. Select the quality of the snapshot.
4. Set the time interval between two snapshots.

5. Click  to save the settings.

### **Uploading to FTP**

You can follow below configuration instructions to upload the snapshots to FTP.

- Upload continuous snapshots to FTP

#### **Steps:**

- 1) Configure the FTP settings and check ☒ Upload Picture checkbox in FTP Settings interface. Please refer to *Section 6.3.8 Configuring FTP Settings* for more details to configure FTP parameters.
- 2) Check the **Enable Timing Snapshot** checkbox.
- Upload event-triggered snapshots to FTP

**Steps:**

- 1) Configure the FTP settings and check ☒ Upload Picture checkbox in FTP Settings interface. Please refer to *Section 6.3.8 Configuring FTP Settings* for more details to configure FTP parameters.
- 2) Check ☒ Upload to FTP checkbox in Motion Detection Settings or Alarm Input interface. Please refer to *Step 3 Set the Alarm Actions Taken for Motion Detection* in *Section 6.6.1*, or *Step 4 Configuring External Alarm Input* in *Section 6.6.4*.
- 3) Check the **Enable Event-triggered Snapshot** checkbox.

Timing	
<input checked="" type="checkbox"/>	Enable Timing Snapshot
Format	JPEG
Resolution	640*480
Quality	Low
Interval	3000 millisecond

Event-Triggered	
<input checked="" type="checkbox"/>	Enable Event-Triggered Snapshot
Format	JPEG
Resolution	640*480
Quality	Low
Interval	2000 millisecond

**Figure 6-37 Snapshot Settings**

## 6.6.15 Configuring Other Alarms

**Purpose:**

This section is for the camera supporting external wireless alarm (e.g. access control alarm), embedded PIR (passive infrared sensor) alarm and manual alarm by remote control.

**Study the wireless alarm and the remote control**



**Purpose:**

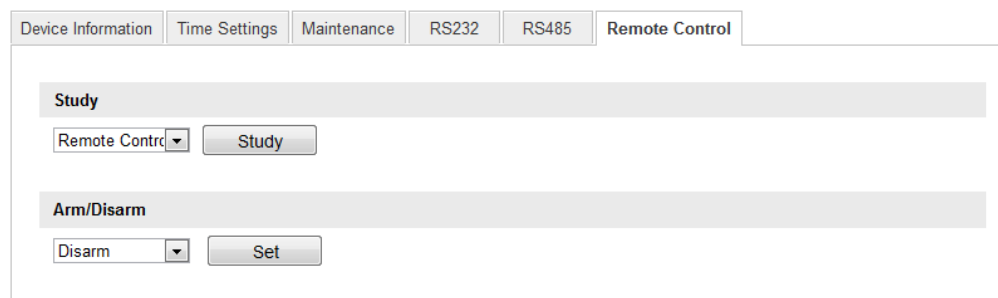
The wireless alarm is the function of the camera to communicate to wireless alarm devices such as the access control. The remote control or other remote alarm devices must be compatible and learn each other's remote signal to communicate.

Before configure the wireless alarm, the camera must study the code of the wireless alarm device.

**Steps:**

1. Enter the Remote Control interface:


**Configuration> Advanced Configuration> System > Remote Control**



The screenshot shows the 'Remote Control' configuration page. At the top, there are tabs for 'Device Information', 'Time Settings', 'Maintenance', 'RS232', 'RS485', and 'Remote Control'. The 'Remote Control' tab is selected. Below the tabs, there are two main sections. The first section is titled 'Study' and contains a dropdown menu labeled 'Remote Control' and a 'Study' button. The second section is titled 'Arm/Disarm' and contains a dropdown menu labeled 'Disarm' and a 'Set' button.

**Figure 6-38** Remote Control Settings

2. Study the code of the remote control or the wireless alarm.

To study a remote control, select Remote Control from the Study drop-down list, and click ; and then press any of the buttons on the remote control against the camera to send the signal.

## Remote Control:

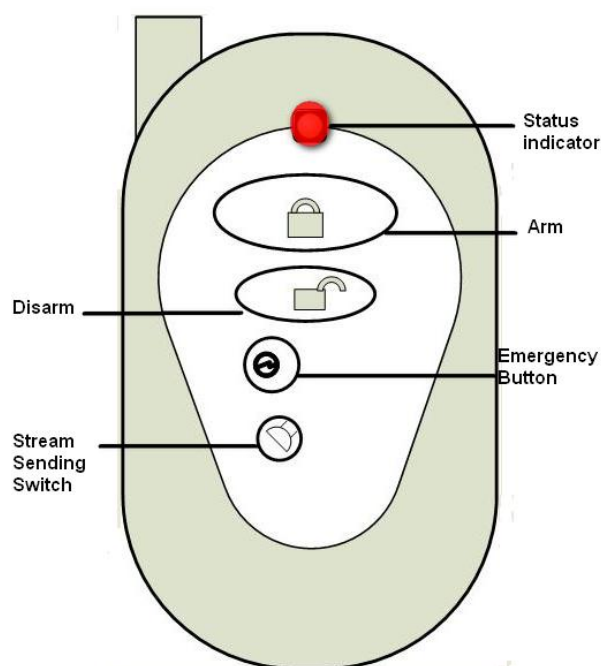


Figure 6-39 Remote Control

## Remote Control Description:

<b>Status Indicator</b>	Indicating the status of the remote; when you press the button on the remote, the indicator flicks in red.
<b>Arm</b>	Press the button to arm the camera. In arming status, the alarm function, such as the wireless alarm and the PIR alarm, is enabled.
<b>Disarm</b>	Press the button to disarm the camera. In the disarming status, the alarm linkage is disabled.
<b>Emergency Button</b>	Press the button to trigger the emergency alarm. The emergency alarm has the highest priority.
<b>Stream Sending Switch</b>	Switch for the video stream transmitting. Press the button to stop or start video stream sending. When the video stream is stopped, you can't see the live view or get the record stream on the remote client or browser.


- To study the wireless alarms, e.g. the access control device, select **Wireless Alarm** from the **Study** drop-down list, and select the device serial number (1-8) from the drop-down list, and click ; and then send the signal from the wireless alarm device to the camera.



Figure 6-40 Study the Wireless Alarm

**Notes:**

- To study the access control device, you can open the door/separate the device to send the signal.

**Configure the Wireless Alarm and PIR Alarm**

- Configure the Wireless Alarm

**Steps:**

- (1) Enter the Wireless Alarm Settings interface:

**Configuration > Advanced Configuration > Events > Other Alarm**

- (2) Select the wireless alarm number. This camera supports up to 8 channels of external wireless alarm input.

Figure 6-41 Wireless Alarm Settings

- (3) Check the checkbox of **Enable Wireless Alarm** to activate the alarm and define the alarm name in the **Alarm Name** field.
- (4) Check the checkbox to select the linkage method taken for the wireless alarm. Audible warning, notify surveillance center, send email, upload to FTP, trigger channel, trigger alarm output and trigger wireless alarm output are selectable. Please refer to **Step 3 Set the Alarm Actions for Motion Detection** in **Section 6.6.1**.

**Note:** DS-2CD8464F-EI(Z)(W) camera supports wireless audible and visual alarm as the wireless alarm output for the wireless alarm. Check the check box of **Wireless audible and visual alarm** to activate the alarm output.




Figure 6-42 Wireless Alarm Output

(5) Click  to save the settings.

- Configure the PIR Alarm

**Steps:**

(1) In the Other Alarm configuration interface, check the checkbox of **Enable PIR Alarm** to activate the PIR alarm and define the alarm name in the **Alarm Name** field.

Figure 6-43 PIR Alarm Settings

(2) Check the checkbox to select the linkage method taken for the PIR alarm. Audible warning, notify surveillance center, send email, upload to FTP, trigger channel, trigger alarm output and trigger wireless alarm output are selectable. Please refer to **Step 3 Set the Alarm Actions for Motion Detection** in **Section 6.6.1**.

**Note:** DS-2CD8464F-EI camera supports wireless audible and visual alarm as the wireless alarm output for the PIR alarm. Check the check box of **Wireless audible and visual alarm** to activate the alarm output.




Figure 6-44 Wireless Alarm Output

(3) Click  to save the settings.

**Note:** The wireless alarm/PIR alarm triggered record will be started if the wireless alarm or PIR alarm is triggered on the defined recording schedule, either when the wireless/PIR alarm is enabled or not. Please refer to **Section 7.2** for details about configuring recording schedule.

### Manual Alarm/Emergency Alarm

Certain series of camera support manual alarm by the remote control. It can be manually triggered and linked to the audio warning if any emergency happens. You can press and hold the manual alarm button on the remote control for 2 seconds to trigger the audio warning manually.

**Notes:**

- The manual alarm is enabled and armed by default and not user-configurable.
- The manual alarm triggered record will be started if the manual alarm is triggered on the defined recording schedule, and will be stopped in 10 seconds after the manual alarm stops. Please refer to *Section 7.2* for details about configuring recording schedule.

### 6.6.16 Arming or Disarming the Camera

**Purpose:**

This section is for camera support the function only. You can follow below steps to configure all-day arming for the camera with the wireless alarm, PIR alarm, motion detection, tamper-proof, etc.

**Notes:**

Emergency alarm is enabled and armed by default and not included in this section. The arming and disarming function can also be realized by the remote control.

- Arm the camera


**Steps:**

1. Enter the Remote Control interface:

**Configuration > Advanced Configuration > System > Remote Control**

2. Select **Arm** from the **Arm/Disarm** drop-down list.
3. Set the arming delay.


**Note:** Arming delay refers to a time delay to arm the camera after you set it to arming status on this page. You can set the delay as 10 seconds, 30 seconds, 1 minute, 3 minutes or 5 minutes. You can also customize the delay time.

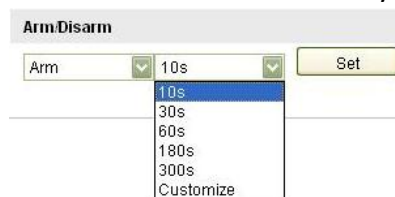

**Figure 6-45 Arm the Camera**

4. Click  to arm the camera.

- Disarm the camera

In the Remote Control interface, select **Disarm** from the **Arm/Disarm** drop-down list and click  to disarm the camera.

**Notes:**

- You can also press the Arm/Disarm button on the remote control to arm/disarm the camera if the camera has already studied the remote control.
- The arming indicator glows red when the camera is armed and glows blue when it's disarmed.



# Chapter 7 Storage Settings

## Before you start:

To configure record settings, please make sure that you have the network storage device within the network or the SD card inserted in your camera.

## 7.1 Configuring NAS Settings

### Before you start:

The network disk should be available within the network and properly configured to store the recorded files, log files, etc.

### Steps:

1. Add the network disk

(1) Enter the NAS (Network-Attached Storage) Settings interface:


**Configuration > Advanced Configuration > Storage > NAS**

HDD No.	Type	Server Address	File Path
1	NAS	172.6.21.99	/dvr/test01
2	NAS		
3	NAS		
4	NAS		
5	NAS		
6	NAS		
7	NAS		
8	NAS		

**Figure 7-1** Add Network Disk

(2) Enter the IP address of the network disk, and the default file path is */dvr/share*.


**Note:** The network disk file path name *share* is user-defined while creating the DVR network storage. Please refer to the *User Manual of NAS* for creating the file path.

(3) Click  to add the network disk.


**Note:** After having saved successfully, you need to reboot the camera to activate the settings.


2. Initialize the added network disk.

(1) Enter the HDD Settings interface (**Advanced Configuration > Storage > Storage Management**), in which you can view the capacity, free space, status, type and property of the disk.

HDD Device List							
<input type="checkbox"/> HDD No.	Capacity	Free space	Status	Type	Property	Progress	
<input type="checkbox"/> 9	195.30GB	0.00GB	Uninitialized	NAS	R/W		


**Figure 7-2** Initialize Disk

- (2) If the status of the disk is **Uninitialized**, check the corresponding checkbox to select the disk and click  to start initializing the disk.

HDD Device List							
<input checked="" type="checkbox"/>	HDD No.	Capacity	Free space	Status	Type	Property	Progress
<input checked="" type="checkbox"/>	g	195.30GB	0.00GB	Uninitialized	NAS	R/W	75%

**Figure 7-3** Initializing

When the initialization completed, the status of disk will become **Normal**.

HDD Device List							
<input type="checkbox"/>	HDD No.	Capacity	Free space	Status	Type	Property	Progress
<input type="checkbox"/>	g	195.30GB	145.50GB	Normal	NAS	R/W	

**Figure 7-4** View Disk Status

**Notes:**

- Up to 8 NAS disks can be connected to the camera.
- To initialize and use the SD card after insert it to the camera, please refer to the steps of NAS disk initialization.

## 7.2 Configuring Recording Schedule

**Purpose:**

There are two kinds of recording for the cameras: manual recording and scheduled recording. For the manual recording, refer to *Section 4.3 Recording and Capturing Pictures Manually*. In this section, you can follow the instructions to configure the scheduled recording. By default, the record files of scheduled recording are stored in the SD card (if supported) or in the network disk.

**Steps:**

1. Enter the Record Schedule Settings interface:

**Configuration > Advanced Configuration > Storage > Record Schedule**



Pre-record 5s

Post-record 5s

Redundant Record No

Record Audio Yes

Expired Time 30

☒ Enable Record Schedule

Edit

0 2 4 6 8 10 12 14 16 18 20 22 24

Mon

Tue

Wed

Thu

Fri

Sat

Sun

Normal

Motion Detection

Alarm

Motion | Alarm

Motion & Alarm

Figure 7-5 Recording Schedule Interface

2. Check the checkbox of **Enable Record Schedule** to enable scheduled recording.
3. Set the record parameters of the camera.

Pre-record 5s

Post-record 5s

Redundant Record No

Record Audio Yes

Expired Time 30

Figure 7-6 Record Parameters

- Pre-record: The time you set to start recording before the scheduled time or the event. For example, if an alarm triggers recording at 10:00, and the pre-record time is set as 5 seconds, the camera starts to record at 9:59:55. The Pre-record time can be configured as No Pre-record, 5 s, 10 s, 15 s, 20 s, 25 s, 30 s or not limited.
- Post-record: The time you set to stop recording after the scheduled time or the event. For example, if an alarm triggered recording ends at 11:00, and the post-record time is set as 5 seconds, the camera records until 11:00:05. The Post-record time can be configured as 5 s, 10 s, 30 s, 1 min, 2 min, 5 min or 10 min.

**Note:** The record parameter configurations vary depending on the camera model.

4. Click  to edit the record schedule.

**Edit Record Schedule**

Mon Tue Wed Thu Fri Sat Sun

☒ All Day Normal

☐ Customize

Period	Start Time	End Time	Record Type
1	00:00	00:00	Normal
2	00:00	00:00	Normal
3	00:00	00:00	Normal
4	00:00	00:00	Normal

Copy to Week ☐ Select All ☒

☒ Mon ☐ Tue ☐ Wed ☐ Thu ☐ Fri ☐ Sat ☐ Sun

Figure 7-7 Record Schedule

5. Choose the day to set the record schedule.

(1) Set all-day record or segment record:

- ◆ If you want to configure the all-day recording, please check the **All Day** checkbox.
- ◆ If you want to record in different time sections, check the **Customize** checkbox. Set the **Start Time** and **End Time**.

**Note:** The time of each segment can't be overlapped. Up to 4 segments can be configured.

(2) Select a **Record Type**. The record type can be Normal, Motion Detection, Alarm, Motion | Alarm, Motion & Alarm, PIR Alarm, Wireless Alarm, Manual Alarm or PIR | Wireless | Manual.

◆ **Normal**

If you select **Normal**, the video will be recorded automatically according to the time of the schedule.

◆ **Record Triggered by Motion Detection**

If you select **Motion Detection**, the video will be recorded when the motion is detected.

Besides configuring the recording schedule, you have to set the motion detection area and check the checkbox of **Trigger Channel** in the **Linkage Method** of Motion Detection Settings interface. For detailed information, please refer to the *Step 1 Set the Motion Detection Area* in the Section 5.6.1.

◆ **Record Triggered by Alarm**

If you select **Alarm**, the video will be recorded when the alarm is triggered via the external alarm input channels.

Besides configuring the recording schedule, you have to set the **Alarm Type** and check the checkbox of **Trigger Channel** in the **Linkage Method** of **Alarm Input Settings** interface. For detailed information, please refer to

#### Section 5.6.4.

◆ **Record Triggered by Motion & Alarm**

If you select **Motion & Alarm**, the video will be recorded when the motion and alarm are triggered at the same time.

Besides configuring the recording schedule, you have to configure the settings on the **Motion Detection** and **Alarm Input Settings** interfaces. Please refer to *Section 5.6.1* and *Section 5.6.4* for detailed information.

◆ **Record Triggered by Motion | Alarm**

If you select **Motion | Alarm**, the video will be recorded when the external alarm is triggered or the motion is detected.

Besides configuring the recording schedule, you have to configure the settings on the **Motion Detection** and **Alarm Input Settings** interfaces. Please refer to *Section 5.6.1* and *Section 5.6.4* for detailed information.

◆ **Record Triggered by PIR Alarm**

If you select **PIR Alarm**, the video will be recorded when the PIR alarm is detected.

Besides configuring the recording schedule, you have to set the PIR alarm and check the checkbox of **Trigger Channel** in the **Normal Linkage** of PIR Alarm in Other Alarm Settings interface. For detailed information, please refer to *Step 2 Configure the PIR Alarm in the Section 5.6.9*.

◆ **Record Triggered by Wireless Alarm**

If you select **Wireless Alarm**, the video will be recorded when the wireless alarm is detected.

Besides configuring the recording schedule, you have to set the wireless alarm and check the checkbox of **Trigger Channel** in the **Normal Linkage** of Wireless Alarm in Other Alarm Settings interface. For detailed information, please refer to *Step 1 Configure the Wireless Alarm in the Section 5.6.9*.

◆ **Record Triggered by Manual Alarm**

If you select **Manual Alarm**, the video will be recorded when manual alarm is triggered.

◆ **Record Triggered by PIR | Wireless | Manual**

If you select **PIR | Wireless | Manual**, the video will be recorded when the PIR alarm or wireless alarm or manual alarm is detected.

Besides configuring the recording schedule, you have to configure the settings for wireless alarm and PIR alarm in Other Alarm Settings interface. For detailed information, please refer to *Section 5.6.9*.

**Edit Schedule**

Mon Tue Wed Thu Fri Sat Sun

☐ All Day

☒ Customize

Period	Start Time	End Time	Record Type
1	00:00	16:00	Normal
2	16:05	22:00	Normal
3	00:00	00:00	Normal
4	00:00	00:00	Normal

Copy to Week ☒ Select All

☒ Mon ☒ Tue ☒ Wed ☒ Thu ☒ Fri ☒ Sat ☒ Sun

**Figure 7-8 Edit Record Schedule**

- (3) Check the checkbox ☐ Select All and click  to copy settings of this day to the whole week. You can also check any of the checkboxes before the date and click .
  - (4) Click  to save the settings and exit the **Edit Record Schedule** interface.
6. Click  to save the settings.

## Chapter 8 Playback

### Purpose:


This section explains how to view the remotely recorded video files stored in the network disks or SD cards.

### Steps:

1. Click  on the menu bar to enter playback interface.



Figure 8-1 Playback Interface

2. Select the date and click .

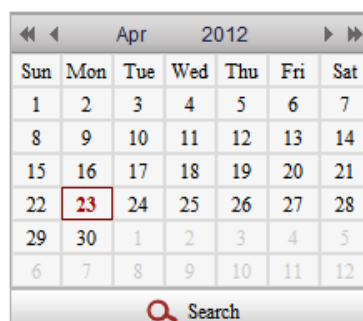



Figure 8-2 Search Video

3. Click  to play the video files found on this date.

The toolbar on the bottom of Playback interface can be used to control playing process.



Figure 8-3 Playback Toolbar

Table 8-1 Description of the buttons

Button	Operation	Button	Operation
	Play		Capture a picture
	Pause		Start/Stop clipping video files
	Stop		Audio on and adjust volume/Mute
	Speed down		Download video files
	Speed up		Download captured pictures
	Playback by frame		

**Note:** You can choose the file paths locally for downloaded playback video files and pictures in Local Configuration interface. Please refer to *Section 5.1* for details. Drag the progress bar with the mouse to locate the exact playback point. You can also input the time and click to locate the playback point in the **Set playback time** field. You can also click to zoom out/in the progress bar.




Figure 8-4 Set Playback Time




Figure 8-5 Progress Bar

The different colors of the video on the progress bar stand for the different video types.




Figure 8-6 Video Types

## Chapter 9 Log Searching


### **Purpose:**

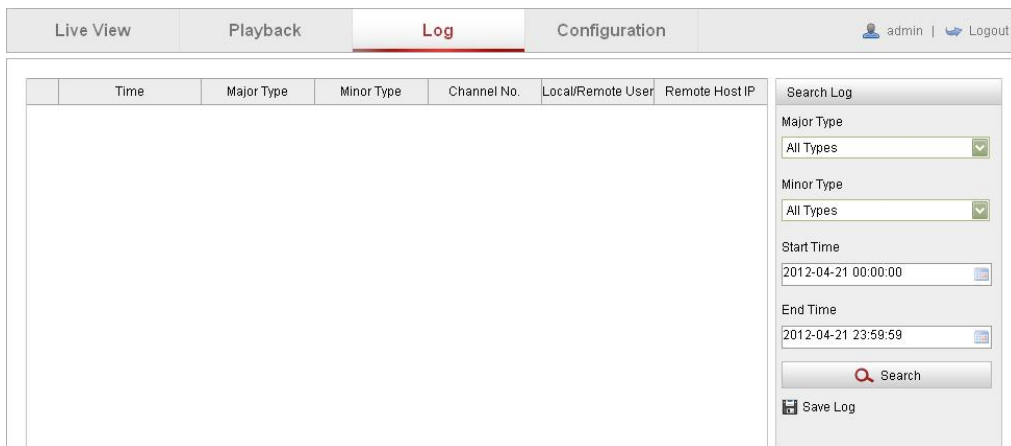
The operation, alarm, exception and information of the camera can be stored in log files. You can also export the log files on your demand.

### **Before you start:**


Please configure network storage for the camera or insert a SD card in the camera.

### **Steps:**

1. Click  on the menu bar to enter log searching interface.




**Figure 9-1** Log Searching Interface

2. Set the log search conditions to specify the search, including the Major Type, Minor Type, Start Time and End Time.
3. Click  to search log files. The matched log files will be displayed on the **Log** interface.



**Figure 9-2** Log Searching

4. To export the log files, click  to save the log files in your computer.

# Chapter 10 Others

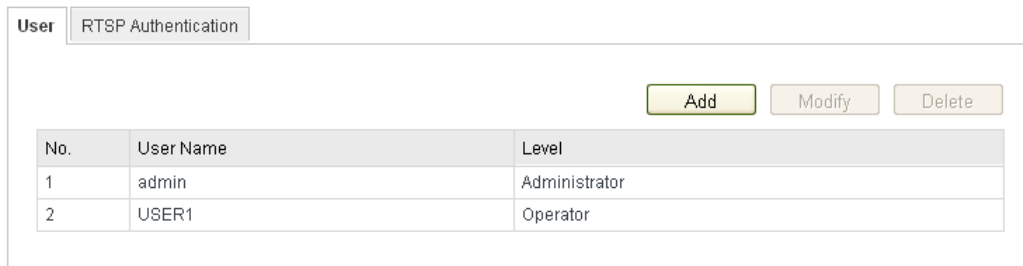
## 10.1 Managing User Accounts

Enter the User Management interface:

**Configuration > Basic Configuration > Security > User**

**Or Configuration > Advanced Configuration > Security > User**

The **admin** user has access to create, modify or delete other accounts. Up to 15 user accounts can be created.




The screenshot shows the 'User' management interface. At the top, there is a tab labeled 'User' and a sub-tab 'RTSP Authentication'. Below these, there are three buttons: 'Add', 'Modify', and 'Delete'. A table displays the current users:

No.	User Name	Level
1	admin	Administrator
2	USER1	Operator


**Figure 10-1** User Information

- Add a User

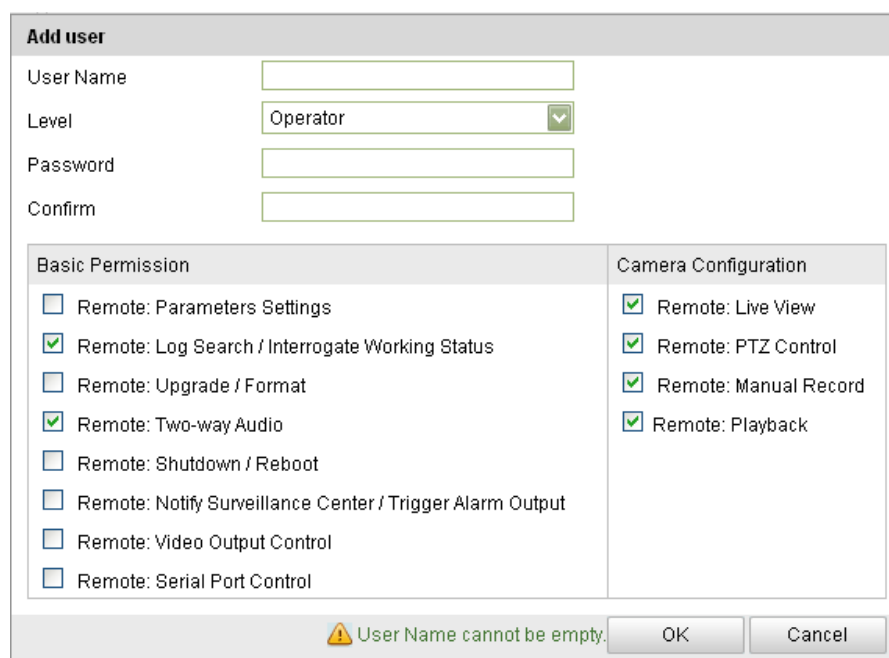
**Steps:**

1. Click  to add a user.
2. Input the new **User Name**, select **Level** and input **Password**.

**Note:** The level indicates the permissions you give to the user. You can define the user as **Operator** or **User**.

3. In the **Basic Permission** field and **Camera Configuration** field, you can check or uncheck the permissions for the new user.
4. Click  to finish the user addition.





**Add user**

User Name:

Level:

Password:

Confirm:

Basic Permission	Camera Configuration
<input type="checkbox"/> Remote: Parameters Settings	<input checked="" type="checkbox"/> Remote: Live View
<input checked="" type="checkbox"/> Remote: Log Search / Interrogate Working Status	<input checked="" type="checkbox"/> Remote: PTZ Control
<input type="checkbox"/> Remote: Upgrade / Format	<input checked="" type="checkbox"/> Remote: Manual Record
<input checked="" type="checkbox"/> Remote: Two-way Audio	<input checked="" type="checkbox"/> Remote: Playback
<input type="checkbox"/> Remote: Shutdown / Reboot	
<input type="checkbox"/> Remote: Notify Surveillance Center / Trigger Alarm Output	
<input type="checkbox"/> Remote: Video Output Control	
<input type="checkbox"/> Remote: Serial Port Control	

⚠ User Name cannot be empty.

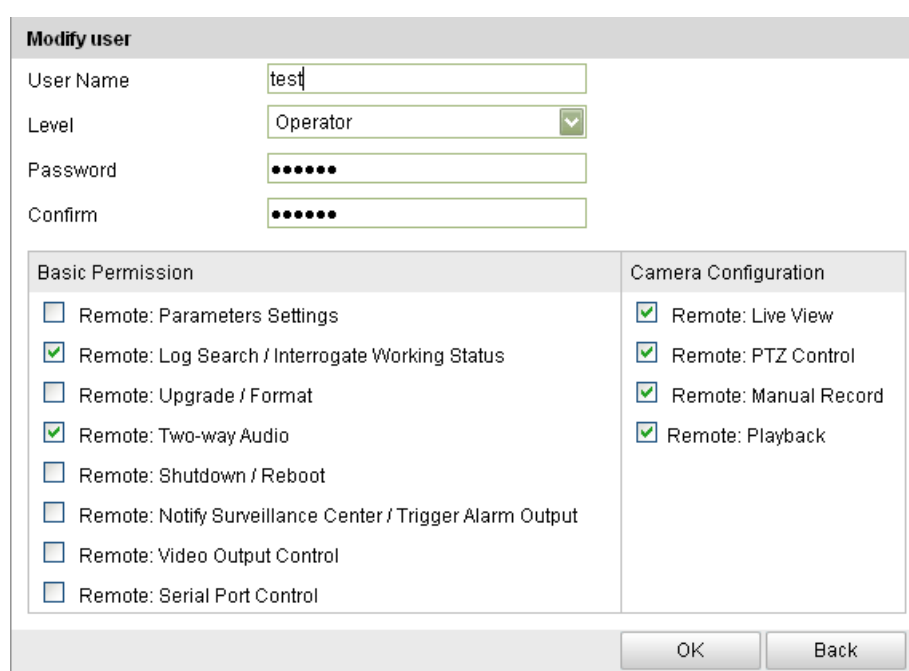
OK Cancel

Figure 10-2 Add a User

### ● Modify a User

#### Steps:

1. Left-click to select the user from the list and click .
2. Modify the **User Name**, **Level** or **Password**.
3. In the **Basic Permission** field and **Camera Configuration** field, you can check or uncheck the permissions.
4. Click  to finish the user modification.



**Modify user**

User Name:

Level:

Password:

Confirm:



Basic Permission	Camera Configuration
<input type="checkbox"/> Remote: Parameters Settings	<input checked="" type="checkbox"/> Remote: Live View
<input checked="" type="checkbox"/> Remote: Log Search / Interrogate Working Status	<input checked="" type="checkbox"/> Remote: PTZ Control
<input type="checkbox"/> Remote: Upgrade / Format	<input checked="" type="checkbox"/> Remote: Manual Record
<input checked="" type="checkbox"/> Remote: Two-way Audio	<input checked="" type="checkbox"/> Remote: Playback
<input type="checkbox"/> Remote: Shutdown / Reboot	
<input type="checkbox"/> Remote: Notify Surveillance Center / Trigger Alarm Output	
<input type="checkbox"/> Remote: Video Output Control	
<input type="checkbox"/> Remote: Serial Port Control	

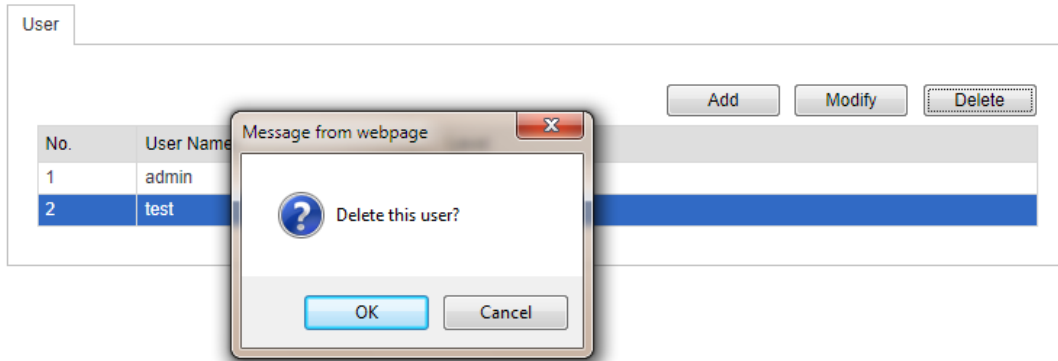
OK Back

Figure 10-3 Modify a User

- Delete a User

**Steps:**

1. Left-click the user name you want to delete and click .
2. Click  on the pop-up dialogue box to delete the user.

**Figure 10-4** Delete a User

## 10.2 Configuring RTSP Authentication

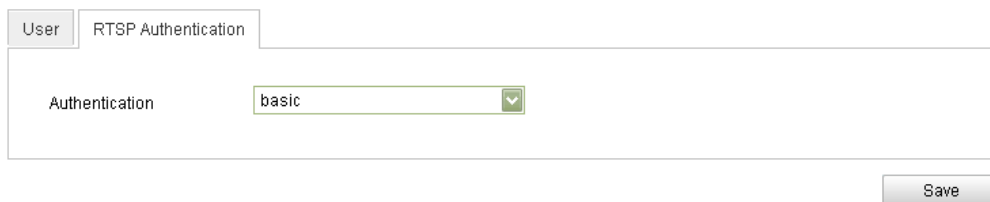
**Purpose:**

You can specifically secure the stream data of live view.

**Steps:**

1. Enter the RTSP Authentication interface:

**Configuration > Advanced Configuration > Security > RTSP Authentication**

**Figure 10-5** RTSP Authentication

2. Select the **Authentication** type **basic** or **disable** in the drop-down list to enable or disable the RTSP authentication.

**Note:** If you disable the RTSP authentication, anyone can access the video stream by the RTSP protocol via the IP address.

3. Click  to save the settings.

## 10.3 Viewing Device Information

Enter the Device Information interface:

## Configuration > Basic Configuration> System > Device Information

## Or Configuration > Advanced Configuration> System > Device Information

In the **Device Information** interface, you can edit the Device Name.

Other information of the network camera, such as Model, Serial No., Firmware Version, Encoding Version, Number of Channels, Number of HDDs, Number of Alarm Input and Number of Alarm Output are displayed. The information cannot be changed in this menu. It is the reference for maintenance or modification in future.

Parameter Type	Parameter Value
Model	DS-2CD8464F-EI
Serial No.	DS-2CD8464F-EI0120111227CCRR406478455
Firmware Version	V4.0.1 120313
Encoding Version	V4.0 build 120312
Number of Channels	1
Number of HDDs	0
Number of Alarm Input	1
Number of Alarm Output	1

Figure 10-6 Device Information

## 10.4 Maintenance

### 10.4.1 Rebooting the Camera

#### Steps:

1. Enter the Maintenance interface:

#### Configuration > Basic Configuration> System > Maintenance

#### Or Configuration > Advanced Configuration> System > Maintenance:

2. Click  to reboot the network camera.



Figure 10-7 Reboot the Device

### 10.4.2 Restoring Default Settings


#### Steps:

1. Enter the Maintenance interface:

**Configuration > Basic Configuration> System > Maintenance**

Or **Configuration > Advanced Configuration> System > Maintenance**

2. Click  or  to restore the default settings.

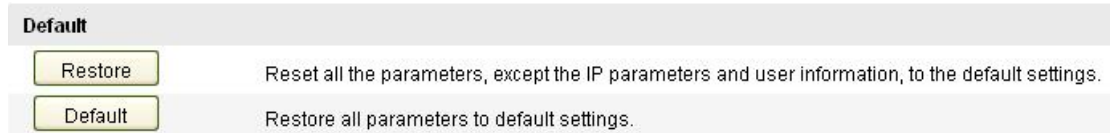

**Figure 10-8** Restore Default Settings

**Note:** After restoring the default settings, the IP address is also restored to the default IP address, please be careful for this action.

### 10.4.3 Importing/Exporting Configuration File

**Steps:**

Enter the Maintenance interface:

**Configuration > Basic Configuration> System > Maintenance**

Or **Configuration > Advanced Configuration> System > Maintenance**

1. Click  to select the local configuration file and then click  to start importing configuration file.

**Note:** You need to reboot the camera after importing configuration file.

2. Click  and set the saving path to save the configuration file in local storage.



**Figure 10-9** Import/Export Configuration File

### 10.4.4 Upgrading the System

**Steps:**

1. Enter the Maintenance interface:

**Configuration > Basic Configuration> System > Maintenance**

Or **Configuration > Advanced Configuration> System > Maintenance**

2. Click  to select the local upgrade file and then click  to start

remote upgrade.

**Note:** The upgrading process will take 1 to 10 minutes. Please don't disconnect power of the camera during the process. The camera reboots automatically after upgrading.

The interface is titled "Remote Upgrade". It contains a "Firmware" label followed by a text input field. To the right of the input field are two buttons: "Browse" and "Upgrade". Below the input field is a "Status" label.

Figure 10-10 Remote Upgrade

## 10.5 RS-232 Settings

### Purpose:

The RS-232 port can be used in two ways:

- **Parameters Configuration:** Connect a computer to the camera through the serial port. Device parameters can be configured by using software such as HyperTerminal. The serial port parameters must be the same as the serial port parameters of the camera.
- **Transparent Channel:** Connect a serial device directly to the camera. The serial device will be controlled remotely by the computer through the network.

### Steps:

1. Enter RS-232 Port Setting interface:

**Configuration> Advanced Configuration> System > RS232**

The interface shows a tabbed menu with "Device Information", "Time Settings", "Maintenance", "RS232", and "RS485". The "RS232" tab is selected. Below the tabs, there are six rows of settings, each with a label and a dropdown menu:

Setting	Value
Baud Rate	115200 bps
Data Bit	8
Stop Bit	1
Parity	None
Flow Ctrl	None
Usage	Console

Figure 10-11 RS-232 Settings

**Note:** If you want to connect the camera by the RS-232 port, the parameters of the RS-232 should be exactly the same with the parameters you configured here.

2. Click  to save the settings.

## 10.6 RS-485 Settings

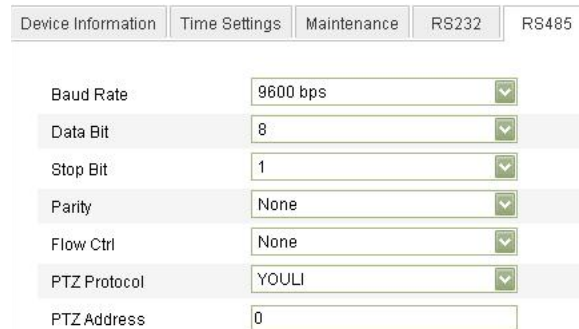
### **Purpose:**

The RS-485 serial port is used to control the PTZ of the camera. The configuring of the PTZ parameters should be done before you control the PTZ unit.

### **Steps:**


1. Enter RS-485 Port Setting interface:

**Configuration> Advanced Configuration> System > RS485**



Setting	Value
Baud Rate	9600 bps
Data Bit	8
Stop Bit	1
Parity	None
Flow Ctrl	None
PTZ Protocol	YOUJI
PTZ Address	0

**Figure 10-12 RS-485 Settings**

2. Set the RS-485 parameters and click  to save the settings.

By default, the Baud Rate is set as 9600 bps, the Data Bit is 8, the stop bit is 1 and the Parity and Flow Control is None.

**Note:** The Baud Rate, PTZ Protocol and PTZ Address parameters should be exactly the same as the PTZ camera parameters.

# Appendix

## Appendix 1 SADP Software Introduction

### ● Description of SADP V 2.0

SADP (Search Active Devices Protocol) is a kind of user-friendly and installation-free online device search tool. It searches the active online devices within your subnet and displays the information of the devices. You can also modify the basic network information of the devices using this software.

### ● Search active devices online

#### ◆ Search online devices automatically

After launch the SADP software, it automatically searches the online devices every 15 seconds from the subnet where your computer locates. It displays the total number and information of the searched devices in the Online Devices interface. Device information including the device type, IP address,

port number, gateway, etc. will be displayed.

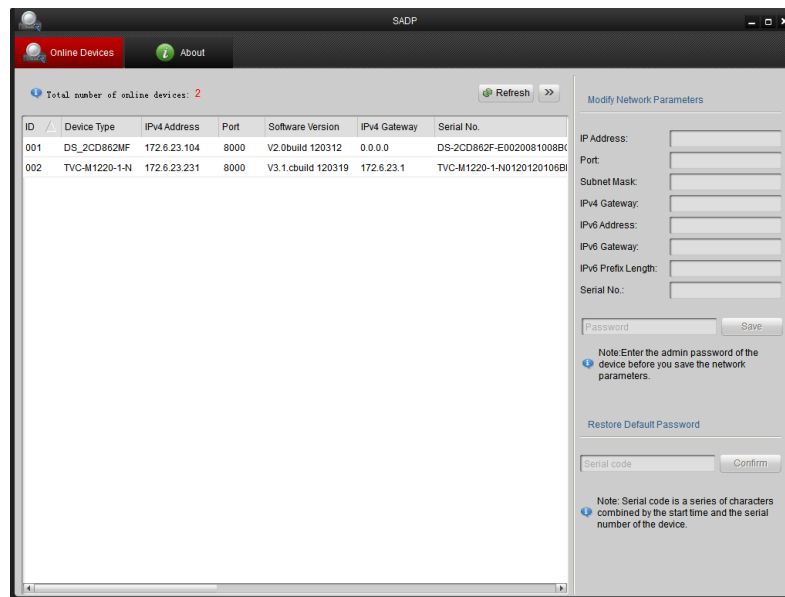







Figure A.1.1 Searching Online Devices

**Note:** Device can be searched and displayed in the list in 15 seconds after it went online; it will be removed from the list in 45 seconds after it went offline.


#### ◆ Search online devices manually

You can also click  to refresh the online device list manually. The newly searched devices will be added to the list.

**Note:** You can click  or  on each column heading to order the information; you can click  to expand the device table and hide the network parameter panel on the right side, or click  to show the network parameter panel.

#### ● Modify network parameters

##### Steps:

1. Select the device to be modified in the device list and the network parameters of the device will be displayed in the **Modify Network Parameters** panel on the right side.
2. Edit the modifiable network parameters, e.g. IP address and port number.
3. Enter the password of the admin account of the device in the **Password** field and click  to save the changes.

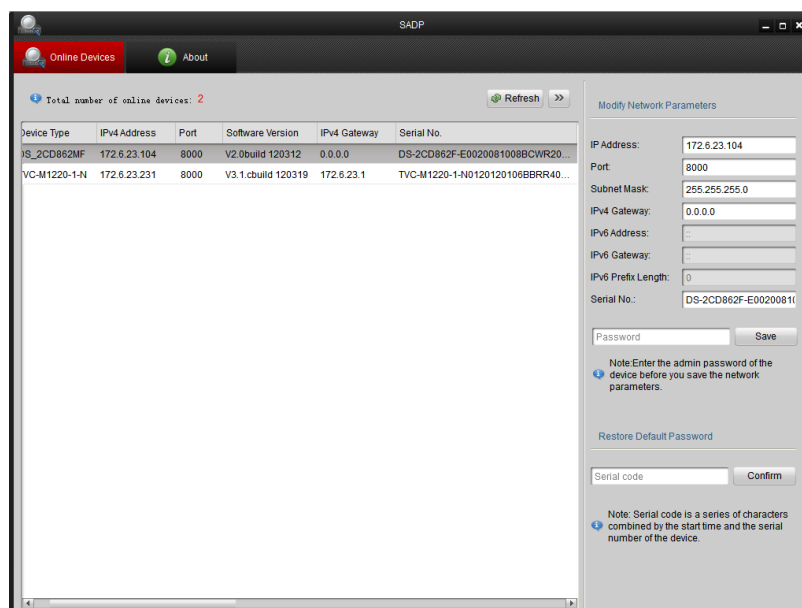



Figure A.1.2 Modify Network Parameters

## ● Restore default password

### Steps:

1. Contact our technical engineers to get the serial code.

**Note:** Serial code is a series of characters combined by the start time and the serial number of the device.

2. Input the code in the **Serial code** field and click  to restore the default password.



## Appendix 2 Port Mapping

The following settings are for TP-LINK router (TL-R410). The settings vary depending on different models of routers.

### Steps:

1. Select the **WAN Connection Type**, as shown below:

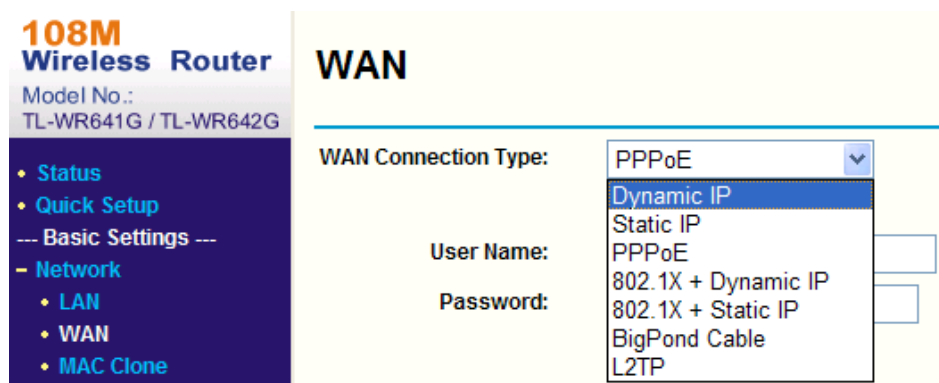


Figure A.2.1 Select the WAN Connection Type

2. Set the **LAN** parameters of the router as in the following figure, including IP address and subnet mask settings.

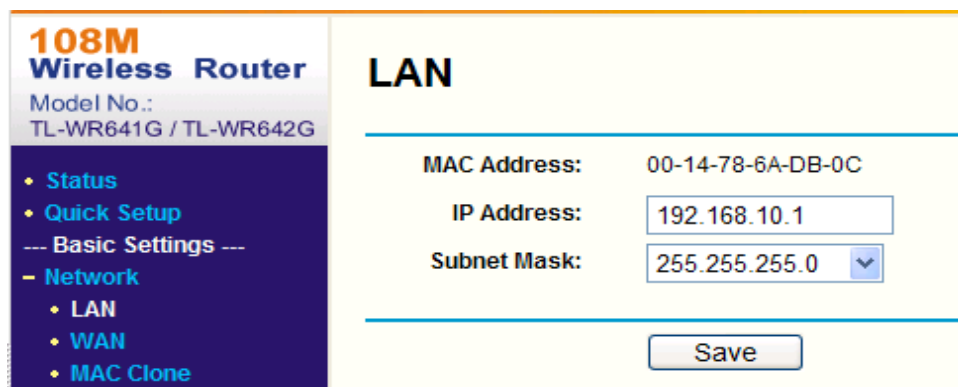


Figure A.2.2 Set the LAN parameters

3. Set the port mapping in the virtual servers of **Forwarding**. By default, camera uses port 80, 8000, 554 and 8200. You can change these ports value with web browser or client software.

### Example:

When the cameras are connected to the same router, you can configure the ports of a camera as 80, 8000, 554 and 8200 with IP address 192.168.1.23, and the

ports of another camera as 81, 8001, 555, 8201 with IP 192.168.1.24. Refer to the steps as below:

**Note:** The 8200 port changes with the 8000 port with a constant value of 200. E.g. if the 8000 port is changed to 8005, then the 8200 port should be changed to 8205.

**Steps:**

1. As the settings mentioned above, map the port 80, 8000, 554 and 8200 for the network camera at 192.168.1.23
2. Map the port 81, 8001, 555 and 8201 for the network camera at 192.168.1.24.
3. Enable **ALL** or **TCP** protocols.
4. Check the **Enable** checkbox and click **Save**.

**108M Wireless Router**  
Model No.: TL-WR641G / TL-WR642G

- Status
- Quick Setup
- Basic Settings ---
- Network
- Wireless
- Advanced Settings ---
- DHCP
- Forwarding
  - Virtual Servers
  - Port Triggering
  - DMZ
  - UPnP
- Security
  - Static Routing
  - Dynamic DNS
- Maintenance ---
- System Tools

### Virtual Servers

ID	Service Port	IP Address	Protocol	Enable
1	80	192.168.10.23	ALL	<input checked="" type="checkbox"/>
2	8000	192.168.10.23	ALL	<input checked="" type="checkbox"/>
3	554	192.168.10.23	ALL	<input checked="" type="checkbox"/>
4	8200	192.168.10.23	ALL	<input checked="" type="checkbox"/>
5	81	192.168.10.24	ALL	<input checked="" type="checkbox"/>
6	8001	192.168.10.24	ALL	<input checked="" type="checkbox"/>
7	555	192.168.10.24	ALL	<input checked="" type="checkbox"/>
8	8201	192.168.10.24	ALL	<input checked="" type="checkbox"/>

Common Service Port: DNS(53)  ID 1

Figure A.2.3 Port Mapping

**Note:** The port of the network camera cannot conflict with other ports. For example, some web management port of the router is 80. Change the camera port if it is the same as the management port.

**First Choice for Security Professionals**